

SINGLE-SUPPLY DUAL COMPARATOR

■ GENERAL DESCRIPTION

The NJM2903 consist of two independent precision voltage comparators with an offset voltage specification as low as 5.0mV max for two comparators, which were designed specifically to operate from a single power supply over a wide range of voltages. Operation from split power supplies is also possible and the low power supply current drain is independent of the magnitude of the power supply voltage. The NJM2903 has unique characteristic: the input common-mode voltage range includes ground, even though operated from a single power supply voltage. Application areas include limit comparators, simple analog-to-digital converters; pulse, square-wave and time delay generators; wide range V_{CO}; MOS clock timers; multivibrators and high voltage digital logic gates. The NJM2903 was designed to directly interface with TTL and MOS. When operated from both plus and minus power supplies, the NJM2903 will directly interface with MOS logic where their low power drain is a distinct advantage over standard comparators.

■ PACKAGE OUTLINE



NJM2903D (DIP8)



NJM2903M (DMP8)



NJM2903V (SSOP8)



NJM2903L (SIP8)



NJM2903E (SOP8)



NJM2903RB1 (MSOP8 (TVSP8))

■ FEATURES

Operating Voltage +2V~+36V

• Single Supply Operation

• Open Collector Output

High Output Sink Current 3mA


• Package Outline DIP8, DMP8, SIP8, SSOP8,

SOP8 JEDEC 150mil,


MSOP8 (TVSP8) MEET JEDEC MO-187-DA/THIN TYPE

Bipolar Technology

■ PIN CONFIGURATION



NJM2903D, NJM2903M, NJM2903V, NJM2903E, NJM2903RB1




NJM2903L

PIN FUNCTION

- 1. A OUTPUT
- 2. A INPUT
- 3. A +INPUT
- 4. GND
- 5. B +INPUT
- 6. B INPUT
- 7. B OUTPUT

8. V⁺

■ EQUIVALENT CIRCUIT (1/2 Shown)

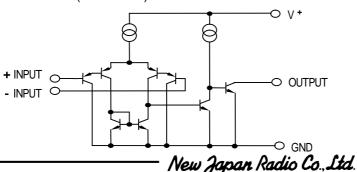

NJM2903

■ ABSOLUTE MAXIMUM RATINGS

(Ta=25°C)

| PARAMETER | SYMBOL RATINGS | | UNIT | |
|-----------------------------|------------------|-------------------|--------|--|
| Supply Voltage | V ⁺ | 36 (or ±18) | V | |
| Differential Input Voltage | V_{ID} | 36 | V | |
| Input Voltage | V_{IN} | -0.3~+36 | V | |
| Power Dissipation | P _D | (DIP8) 500 | | |
| | | (DMP8) 300 | mW | |
| | | (SSOP8) 250 | | |
| | | (SIP8) 800 | 1110 V | |
| | | (SOP8) 300 | | |
| | | (MSOP8(TVSP8))320 | | |
| Operating Temperature Range | T _{opr} | -40~+85 | °C | |
| Storage Temperature Range | T _{stg} | -50~+125 | °C | |


■ ELECTRICAL CHARACTERIS

(V⁺=5V,Ta=25°C)


| PARAMETER | SYMBOL | TEST CONDITION | MIN. | TYP. | MAX. | UNIT |
|---------------------------------|-------------------|--|-------|------|------|------|
| Input Offset Voltage | V _{IO} | $R_S=0\Omega, V_O=1.4V$ | - | - | 7 | mV |
| Input Offset Current | I _{IO} | | - | - | 50 | nΑ |
| Input Bias Current | I_{B} | | - | 30 | 250 | nΑ |
| Input Common Mode Voltage Range | V_{ICM} | | 0~3.5 | - | - | V |
| Large Signal Voltage Gain | A_V | $R_L=15k\Omega$ | - | 106 | - | dB |
| Response Time | t_R | $R_L=5.1k\Omega$ | - | 1.5 | - | μs |
| Output Sink Current | I _{SINK} | $V_{IN} = 1V, V_{IN}^{+} = 0V, V_{O} = 1.5V$ | 6 | - | - | mΑ |
| Output Saturation Voltage | V_{SAT} | $V_{IN}=1V,V_{IN}=0V,I_{SINK}=3mA$ | - | 200 | 400 | mV |
| Output Leakage Current | I _{LEAK} | $V_{IN} = 0V, V_{IN}^{+} = 1V, V_{O} = 5V$ | - | - | 1.0 | μA |
| Operating Current | I _{CC} | | - | 0.4 | 1.0 | mA |

■ TYPICAL CHARACTERISTICS


Input Bias Current vs. Temperature




Input Offset Voltage vs. Temperature




Operating Current vs. Operating Voltage



Input Bias Current vs. Operating Voltage




NJM2903 Output Saturation Voltage vs. Output Sink Current




■ TYPICAL CHARACTERISTICS

Response Time for Various Input Overdrives $(V^+=5V, \ R_L=5.1k\Omega, \ T_a=25^{\circ}C)$





NJM2903 Output Saturation Voltage vs. Operating Voltage


Time $t (\mu s)$



■ TYPICAL APPLICATIONS







[CAUTION] The specifications on this databook are only given for information, without any guarantee as regards either mistakes or omissions. The application circuits in this databook are described only to show representative usages of the product and not intended for the guarantee or permission of any right including the industrial rights.