


Surface Mount Fuse Very Fast Acting

**PRODUCT: 2410SFV Family
(Marked)**

DOCUMENT: SCD27651
 REV LETTER: G
 REV DATE: JULY 26, 2016
 PAGE NO.: 1 OF 7

Specification Status: Released

Termination Material: Copper, Ni, Tin
 Fuse Element: Copper/Copper alloy
 Body Material: Fiberglass/Epoxy
 Operating Temperature :
 -55°C to +125°C (with de-rating)



Clear Time Characteristics

% of current rating	Clear time at 25°C	
	Min.	Max.
100%	4 hours	
200% (0.5A-10.0A)	0.01 sec	5 sec
200% (12.0A-20.0A)	0.01 sec	20 sec


Dimensions

	A		B		C		D	
	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX
mm	5.95	6.25	1.96	2.36	0.97	1.73	2.34	2.64
in	(0.234)	(0.246)	(0.077)	(0.093)	(0.038)	(0.068)	(0.092)	(0.104)

Part Number	Marking Code	Rated Current (A)	Interrupt Rating	Voltage Rating (V)		Nominal Cold DC Resistance (DCR) (Ω)*	Nominal I ² t (A ² s) ²
				AC	DC		
2410SFV0.50FM/125	C	0.50	UL: 0.5~2A 100A @250V _{AC} 2.5~8A 50A @ 125V _{AC} 0.5~8A 50A @ 125V _{DC} 300A @ 32V _{DC} TUV: 0.5A, 0.63A, 1A, 1.25A, 2A 100A @250V _{AC} 50A @125V _{DC} CQC: 0.5A, 1A, 2A 100A @250V _{AC} 50A @125V _{DC}	250	125	0.2310	0.1
2410SFV0.63FM/125	S	0.63		250	125	0.1740	0.16
2410SFV0.75FM/125	D	0.75		250	125	0.1480	0.23
2410SFV1.00FM/125	E	1.00		250	125	0.0930	0.59
2410SFV1.25FM/125	F	1.25		250	125	0.0700	0.96
2410SFV1.50FM/125	G	1.50		250	125	0.0620	1.19
2410SFV2.00FM/125	I	2.00		250	125	0.0420	2.75
2410SFV2.50FM/125	J	2.50		125	125	0.0310	1.21
2410SFV3.00FM/125	K	3.00		125	125	0.0249	1.73
2410SFV3.15FM/125	V	3.15		125	125	0.0232	2.2
2410SFV3.50FM/125	L	3.50		125	125	0.0220	2.5
2410SFV4.00FM/125	M	4.00		125	125	0.0172	4.1
2410SFV5.00FM/125	N	5.00		125	125	0.0143	5.9
2410SFV6.30FM/125	O	6.30		125	125	0.0100	12.5
2410SFV7.00FM/125	P	7.00		125	125	0.0094	14.2
2410SFV8.00FM/125	R	8.00	UL: 35A@125V _{AC} 50A @ 125V _{DC} 300A @ 32V _{DC}	125	125	0.0086	20.3
2410SFV10.0FM/125	Q	10.00		125	125	0.0066	29.2
2410SFV12.0FM/065	X	12.00	UL: 50A @ 65V _{AC} 50A @ 65V _{DC} 300A @ 32V _{DC}	65	65	0.0053	49.2
2410SFV15.0FM/065	Y	15.00		65	65	0.0038	102.5
2410SFV20.0FM/065	Z	20.00	UL: 50A @ 65V _{AC} 100A @ 65V _{DC} 300A @ 32V _{DC}	65	65	0.0034	126.2


* Measured at ≤10% of rated current and 25°C ambient

Average Clear-Time Curves for 2410 Devices

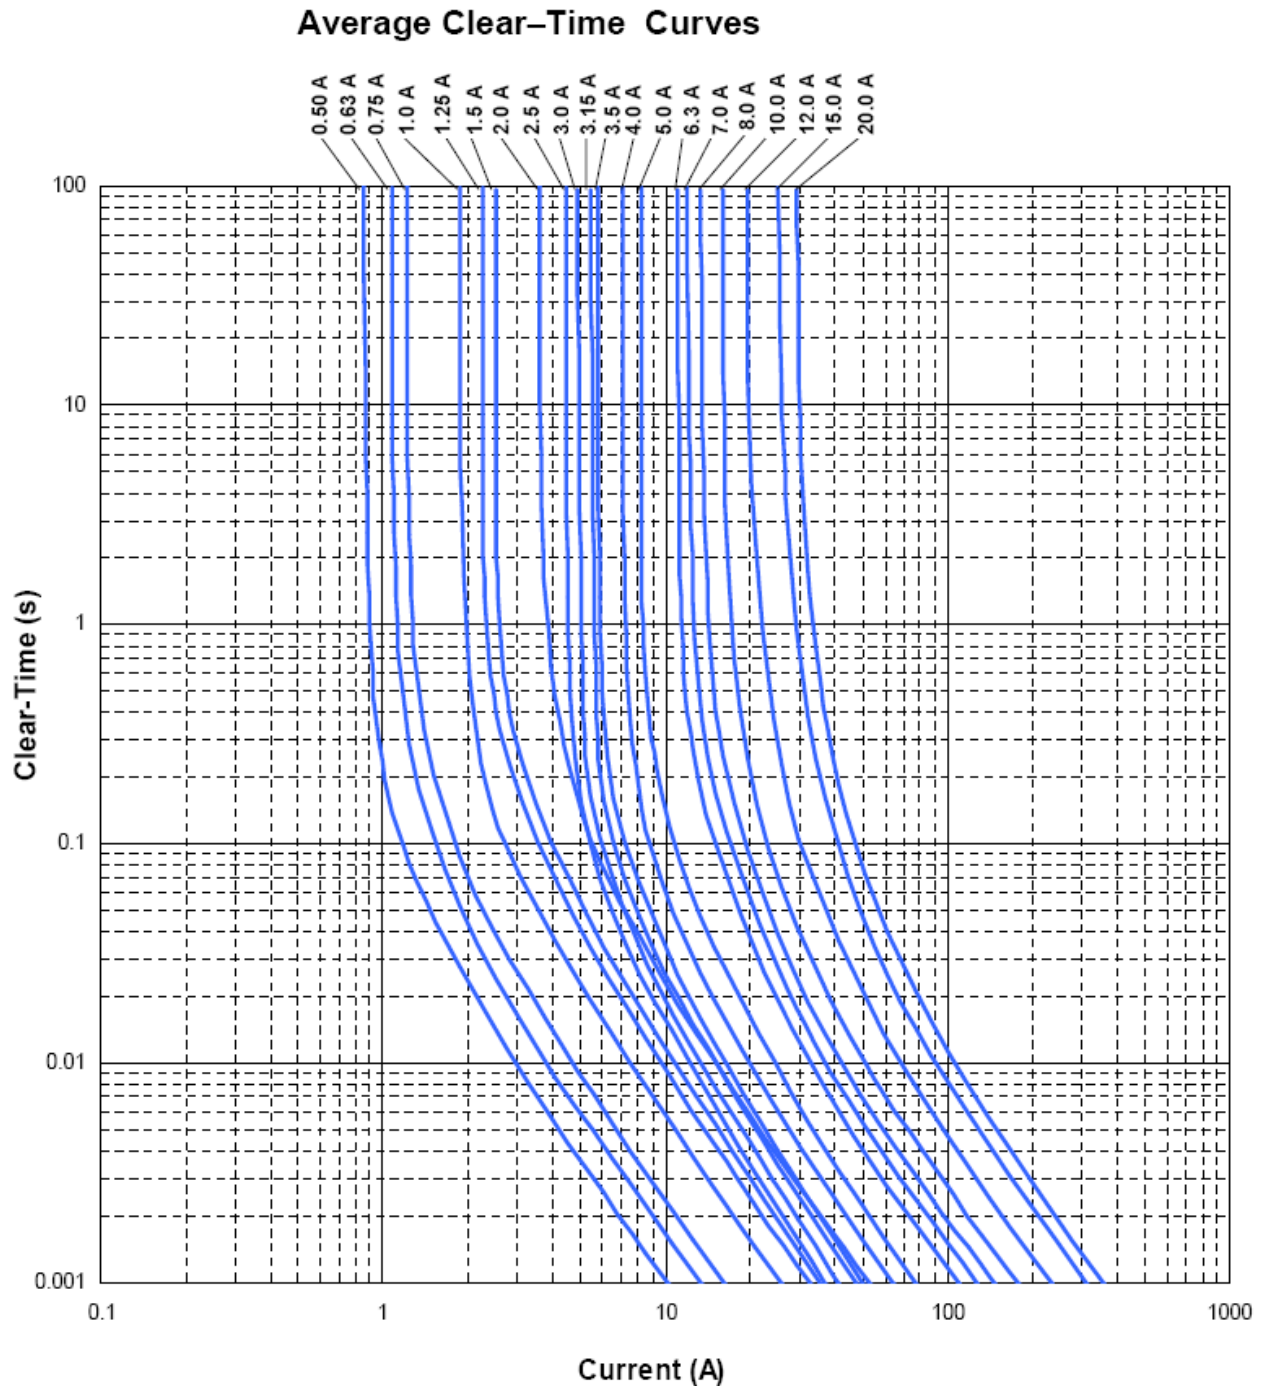

I²t Curves for 2410 Devices

Average I²t vs. t Curves

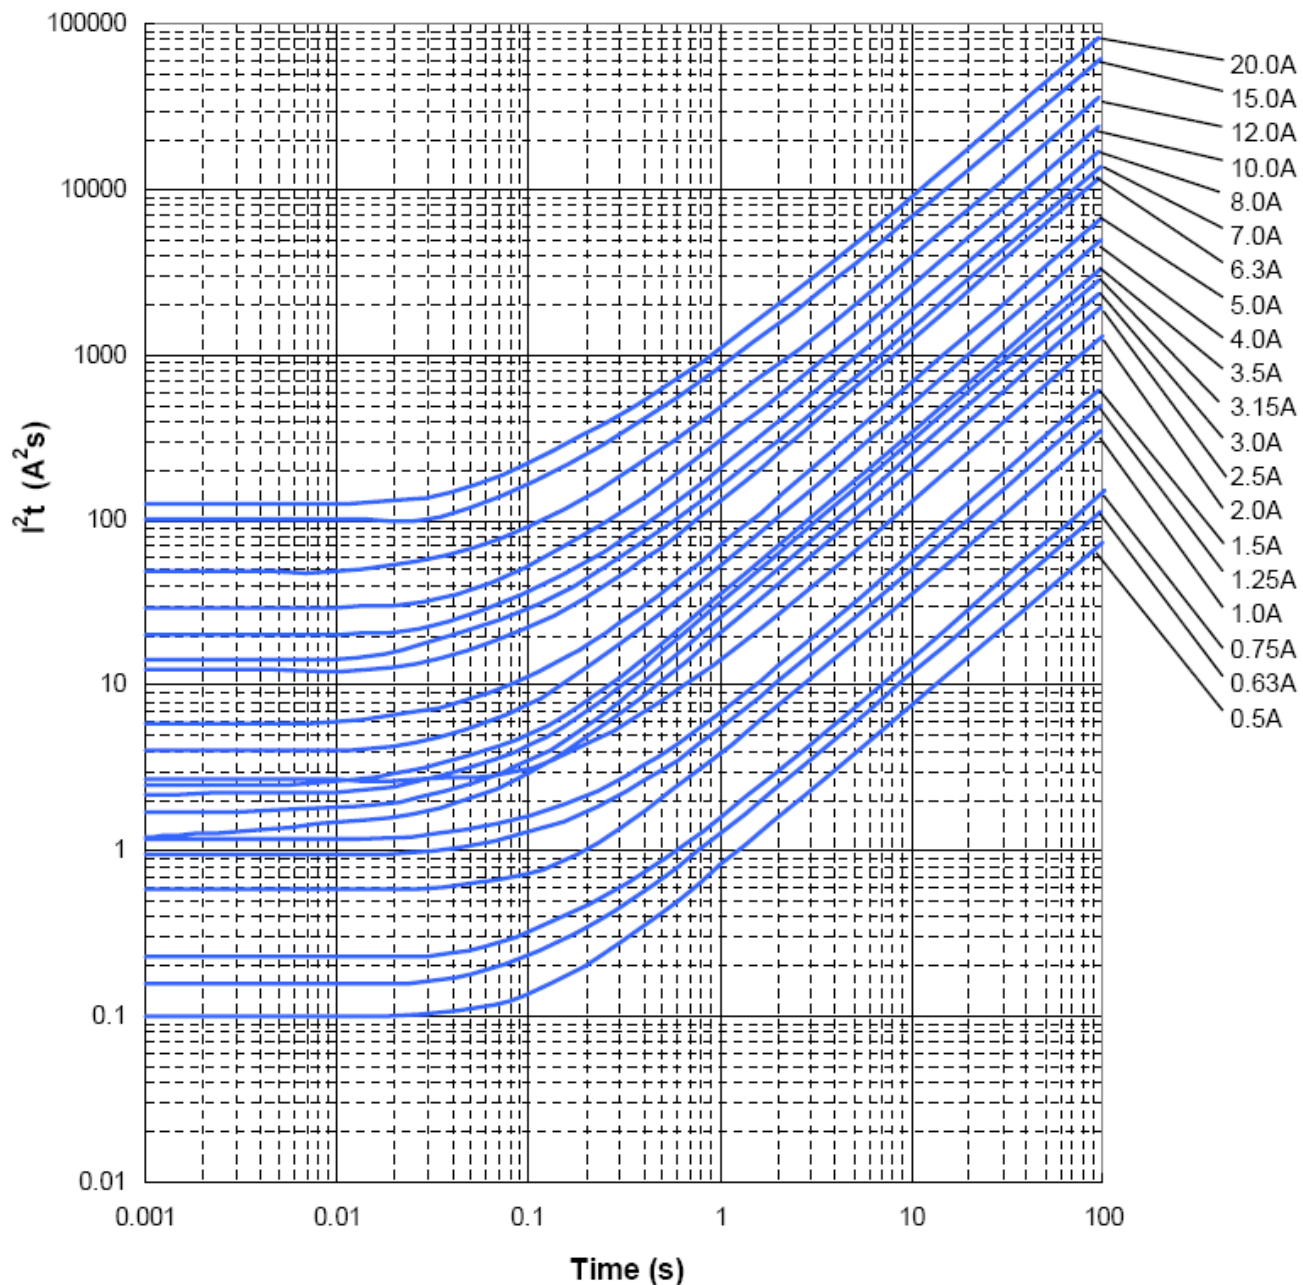

Surface Mount Fuse Very Fast Acting


**PRODUCT: 2410SFV Family
(Marked)**

DOCUMENT: SCD27651
REV LETTER: G
REV DATE: JULY 26, 2016
PAGE NO.: 4 OF 7


Product Characteristics for 2410 Devices

Reliability Test	Test Condition and Requirement
Reflow & Bend	3 reflows at 245°C followed by a 2 mm bend, 20% DCR change max. (10% for ≤1A), no mechanical damage
Solderability	245°C, 5 seconds, new solder coverage 90% minimum
Soldering Heat Resistance	260°C (according to MIL-STD-202, Method 210, Test condition B)
Life	25°C, 2000 hours, 80% rated current (75% for <1A), voltage drop change ≤±20%
Thermal Shock	-65°C to +125°C, 100 cycles, 10% DCR change max., no mechanical damage
Mechanical Vibration	5 – 3000 Hz, 0.4 inch double amplitude or 30 G peak, 10% DCR change max., no mechanical damage
Mechanical Shock	1500 G, 0.5 milliseconds, half-sine shocks, 10% DCR change max., no mechanical damage
Salt Spray	5% salt solution, 48 hour exposure, 10% DCR change max., no excessive corrosion
Moisture Resistance	10 cycles, 15% DCR change max., no excessive corrosion

Part Naming for 2410 Devices

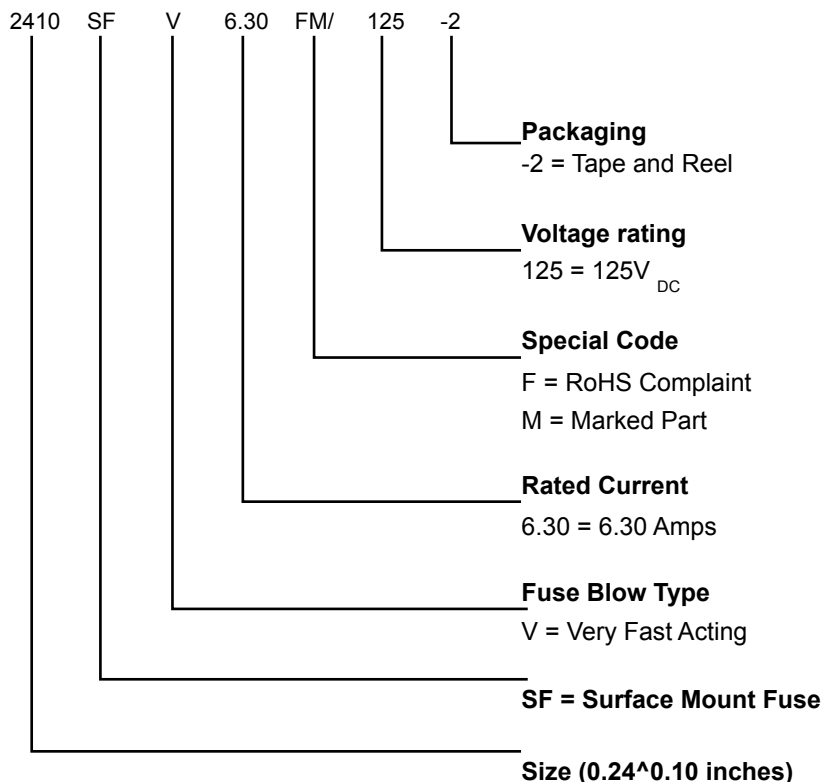

Temperature De-rating Curve for 2410 Devices

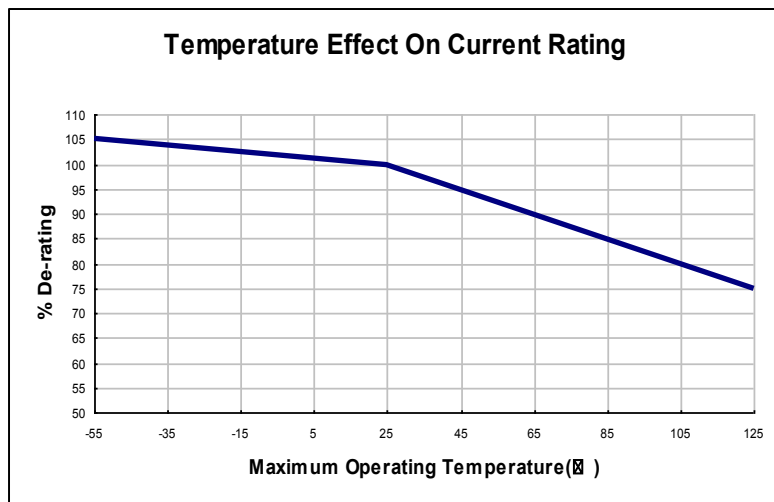


Solder Reflow Recommendation for 2410 Devices

Profile Feature	
Average ramp up rate ($T_{S_{MAX}}$ to T_p)	3°C/second max.
Preheat	
• Temperature min. (T_{SMIX})	150°C
• Temperature max. ($T_{S_{MAX}}$)	200°C
• Time ($t_{S_{MIN}}$ to $t_{S_{MAX}}$) 60-180 seconds	40 – 100 Seconds
Time maintained above:	
• Temperature (T_L)	200°C
• Time (t_L)	30 Seconds Min.
Peak/Classification temperature (T_p)	250°C Max.
Time within 5°C of actual peak temperature	
Time (t_p)	30 – 40 Seconds
From 25°C to preheating (150°C)	40 – 100 seconds
Ramp down rate	Natural Cooling


Surface Mount Fuse Very Fast Acting

**PRODUCT: 2410SFV Family
(Marked)**


DOCUMENT: SCD27651
REV LETTER: G
REV DATE: JULY 26, 2016
PAGE NO.: 6 OF 7

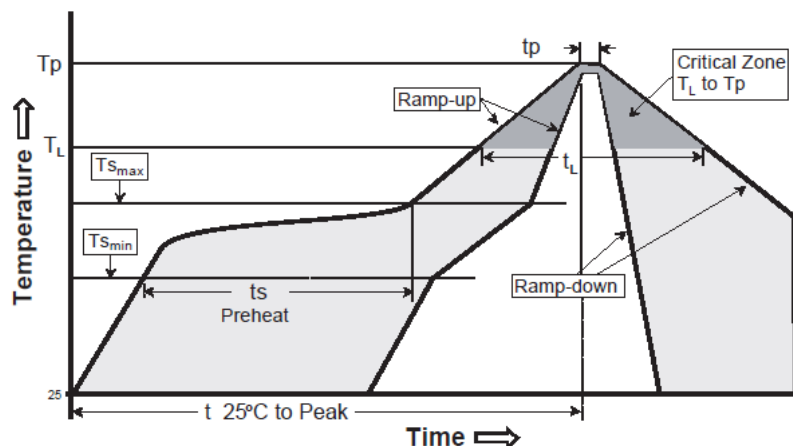

Recommended Pad Layout for 2410 Devices mm (inch)

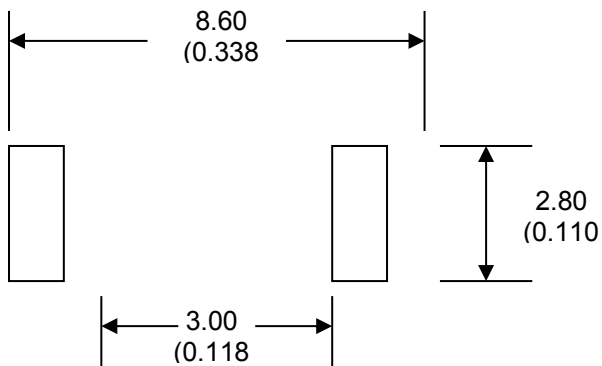

Package Information for 2410 Devices

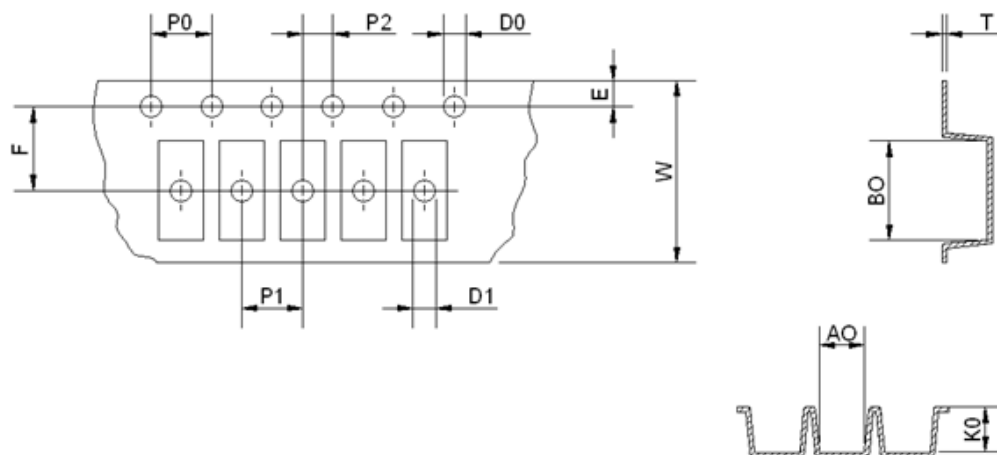


Surface Mount Fuse Very Fast Acting

**PRODUCT: 2410SFV Family
(Marked)**

DOCUMENT: SCD27651
REV LETTER: G
REV DATE: JULY 26, 2016
PAGE NO.: 7 OF 7

	E	F	W	P1	P0	P2
mm (in)	1.75±0.10 (0.069±0.004)	5.50±0.10 (0.217±0.004)	12.00±0.10 (0.472±0.004)	4.00±0.10 (0.157±0.004)	4.00±0.10 (0.157±0.004)	2.00±0.05 (0.079±0.002)
	D0	D1	T	A0	B0	K0
mm (in)	1.50+0.10/-0.00 (0.059+0.004/-0.000)	1.55±0.10 (0.61±0.004)	0.25±0.05 (0.010±0.002)	2.85±0.10 (0.112±0.004)	6.40±0.10 (0.252±0.004)	2.35±0.10 (0.093±0.004)

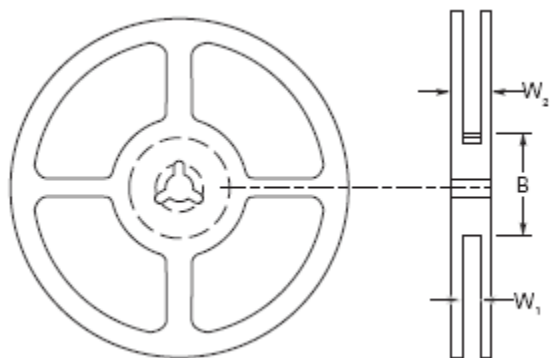

	B	W ₁	W ₂
mm (in)	60.2 (2.37)	13.40 (0.528)	16 (0.63)

Agency Recognition:
Precedence:
Effectivity:

UL E197536, CQC 12012078873, TUV 50269651
This specification takes precedence over documents referenced herein.
Reference documents shall be the issue in effect on the date of invitation for bid.

Materials Information

ROHS Compliant

Directive 2002/95/EC
Compliant

ELV Compliant

Directive 2000/53/EC
Compliant

Pb-Free



Halogen Free*



* Halogen Free refers to: Br≤900ppm, Cl≤900ppm, Br+Cl≤1500ppm



Expertise Applied | Answers Delivered

Surface Mount Fuse Very Fast Acting

**PRODUCT: 2410SFV Family
(Marked)**

DOCUMENT: SCD27651
REV LETTER: G
REV DATE: JULY 26, 2016
PAGE NO.: 8 OF 8

Littelfuse products are not designed for, and shall not be used for, any purpose (including, without limitation, automotive, military, aerospace, medical, life-saving, life-sustaining, nuclear facility applications, devices intended for surgical implant into the body, or any other application in which the failure or lack of desired operation of the product may result in personal injury, death, or property damage) other than those expressly set forth in applicable Littelfuse product documentation. Warranties granted by Littelfuse shall be deemed void for products used for any purpose not expressly set forth in applicable Littelfuse documentation. Littelfuse shall not be liable for any claims or damages arising out of products used in applications not expressly intended by Littelfuse as set forth in applicable Littelfuse documentation. The sale and use of Littelfuse products is subject to Littelfuse Terms and Conditions of Sale, unless otherwise agreed by Littelfuse.