

## 0.8 Amp. Glass Passivated Bridge Rectifier

<p>Dimensions in mm.</p> <table border="1"> <tr><td>Suffix</td><td><math>L \pm 0.5</math></td></tr> <tr><td>"A"</td><td>4</td></tr> <tr><td>"B"</td><td>3</td></tr> </table>	Suffix	$L \pm 0.5$	"A"	4	"B"	3	<p>Voltage 100 to 900 V. Current 0.8 A</p> <ul style="list-style-type: none"> <li>• Glass Passivated Junction</li> <li>• Case: Epoxy encapsulation</li> <li>• Terminals: Radial leads</li> <li>• Ideal for P.C.B.</li> </ul> <p>Lead and polarity identifications</p>
Suffix	$L \pm 0.5$						
"A"	4						
"B"	3						



### Maximum Ratings, according to IEC publication No. 134

		B40 C800	B80 C800	B125 C800	B250 C800	B380 C800
$V_{RRM}$	Peak Recurrent Reverse Voltage (V)	100	200	300	600	900
$V_{RMS}$	Maximum RMS Voltage (V)	70	140	210	420	630
$V_R$	Recommended Input Voltage (V)	40	80	125	250	380
$I_{F(AV)}$	Forward current at Tamb = 25 °C R load C load			1.0 A 0.8 A		
$I_{FRM}$	Recurrent peak forward current			8 A		
$I_{FSM}$	10 ms. peak forward surge current			30 A		
$I^2t$	$I^2t$ value for fusing ( $t = 10$ ms)			4.5 A <sup>2</sup> sec		
$T_j$	Operating temperature range			– 40 to + 150 °C		
$T_{stg}$	Storage temperature range			– 40 to + 150 °C		

### Electrical Characteristics at Tamb = 25 °C

$V_F$	Max. forward voltage drop per element at $I_F = 0.8$ A	1 V
$I_R$	Max. reverse current per element at $V_{RWM}$	10 $\mu$ A

## Characteristic Curves

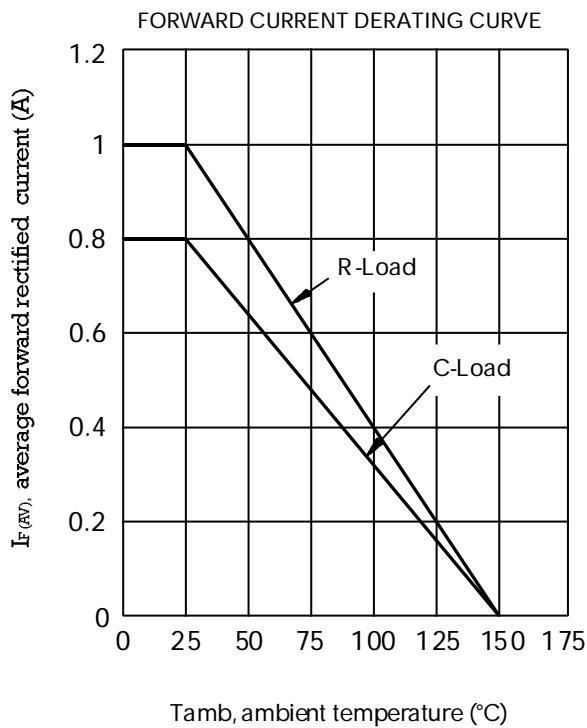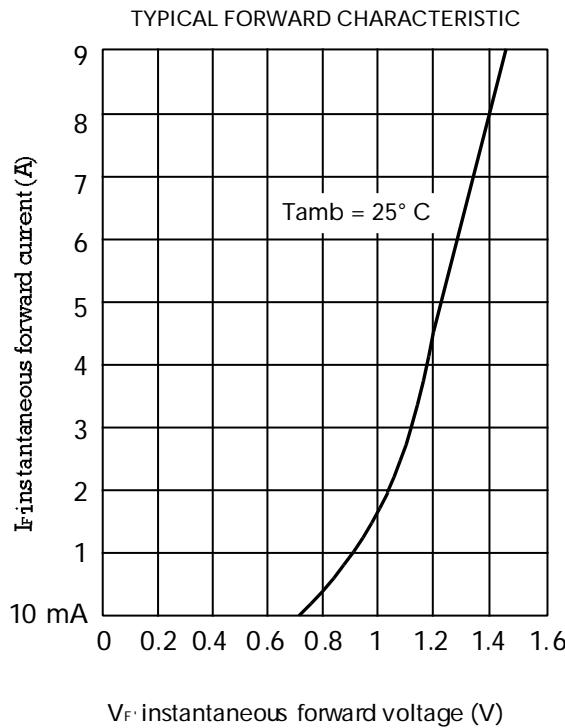

### OPERATION WITH CAPACITIVE LOAD

Limit values of  $R_S$  and  $C_L$  for a dequate protection a  
gainst switching transient.

Recommended input voltage V <sub>RMS</sub>	Min. RS Tol ± 10 % Ohms	Max CL + 50 % - 20 % μ F
40	1	2500
80	2	1000
125	3	500
250	6	250
300	14	150

