
## BB221, BB222

#### **TUNER DIODES**

Silicon Epitaxial Planar Capacitance Diodes with very wide effective capacitance variation for tuning the whole range of VHF or UHF television bands.

These diodes are available as singles or as matched sets of two or more units according to the tracking condition described below.

The diodes are delivered taped. Details see "Taping".



Glass case JEDEC DO-35 Dimensions in mm

#### Absolute Maximum Ratings (T $_a = 25^{\circ}$ C)

	Symbol	Value	Unit
Reverse Voltage	V <sub>R</sub>	32	V
Junction Temperature	Tj	125	°C
Storage Temperature Range	Ts	-55 to +150	°C



Тел.: (495) 795-0805 Факс: (495) 234-1603 Эл. почта: info@rct.ru Веб: www.rct.ru

## BB221, BB222

### Characteristics at $T_j = 25^{\circ}C$

		Symbol	Min.	Тур.	Max.	Unit		
Leakage Current								
at V <sub>R</sub> = 30V		I <sub>R</sub>	-	-	30	nA		
Capacitance								
at V <sub>R</sub> = 1V		C <sub>tot</sub>	-	17	-	pF		
at V <sub>R</sub> = 3V		C <sub>tot</sub>	-	11	-	pF		
at V <sub>R</sub> = 28V	BA221	C <sub>tot</sub>	1.8	-	2.2	pF		
	BA222	C <sub>tot</sub>	1.8	-	2.5	pF		
Effective Capacitance Ratio								
at $V_R$ = 1 to 28V	BA221	$\frac{C_{tot}(1V)}{C_{tot}(28V)}$	8	-	9.5	-		
	BA222	$\frac{C_{tot}(1V)}{C_{tot}(28V)}$	7.3	-	9.5	-		
Series Resistance								
at f = 470MHz, C <sub>tot</sub> = 9pF	BA221	r <sub>s</sub>	-	0.55	0.7	Ω		
	BA222	r <sub>s</sub>	-	0.8	1	Ω		
Cutoff Frequency for Q = 1								
at V <sub>R</sub> = 3V	BA221	f <sub>Q1</sub>	-	24	-	GHz		
	BA222	$f_{Q1}$	-	16	-	GHz		
Series Resonance Frequency								
at V <sub>R</sub> = 25V	BA221	f <sub>O</sub>	-	2	-	GHz		
	BA222	f <sub>O</sub>	-	1.8	-	GHz		
Series Inductance				2.5		nU		
measured in 1.5 mm Distance from case		Ls	-	2.5	-	nH		
Reverse Breakdown Voltage		V.	32	-	-	V		
at I <sub>R</sub> = 10µA		V <sub>(BR)R</sub>						
For any two diodes of a matched group the following tracking condition applies:								
In the reverse bias voltage range of $V_R$ = 0.5 V to $V_R$ = 28 V the maximum capacitance deviation is 2.5%.								













Dated : 31/12/2002

# BB221, BB222

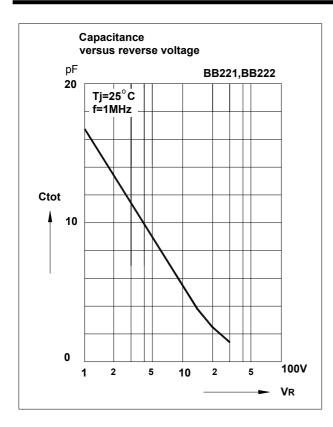

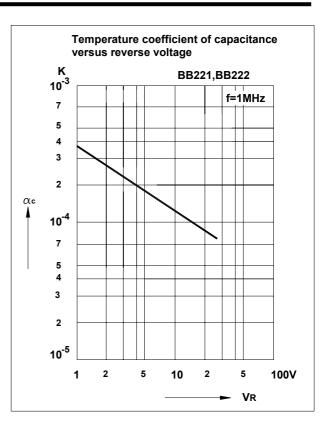

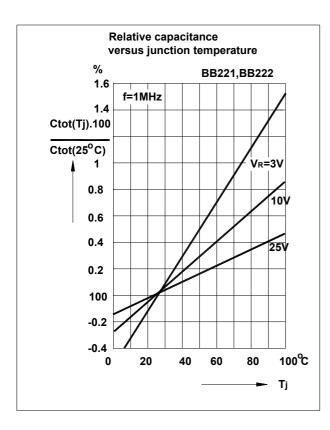

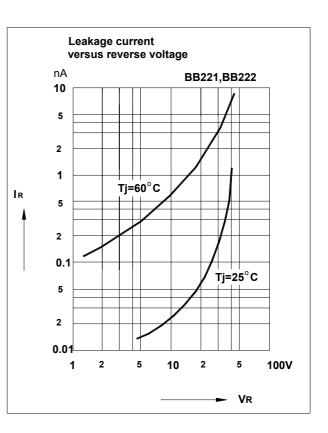








Dated : 31/12/2002

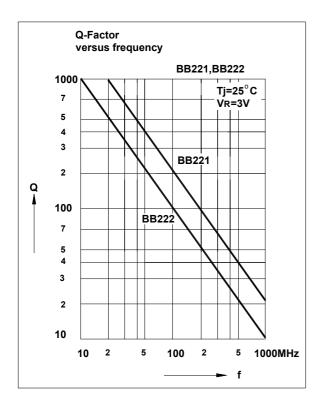











Dated : 31/12/2002