


▷ SPECIFICATIONS (Rating Table) / UL, CUL E156388

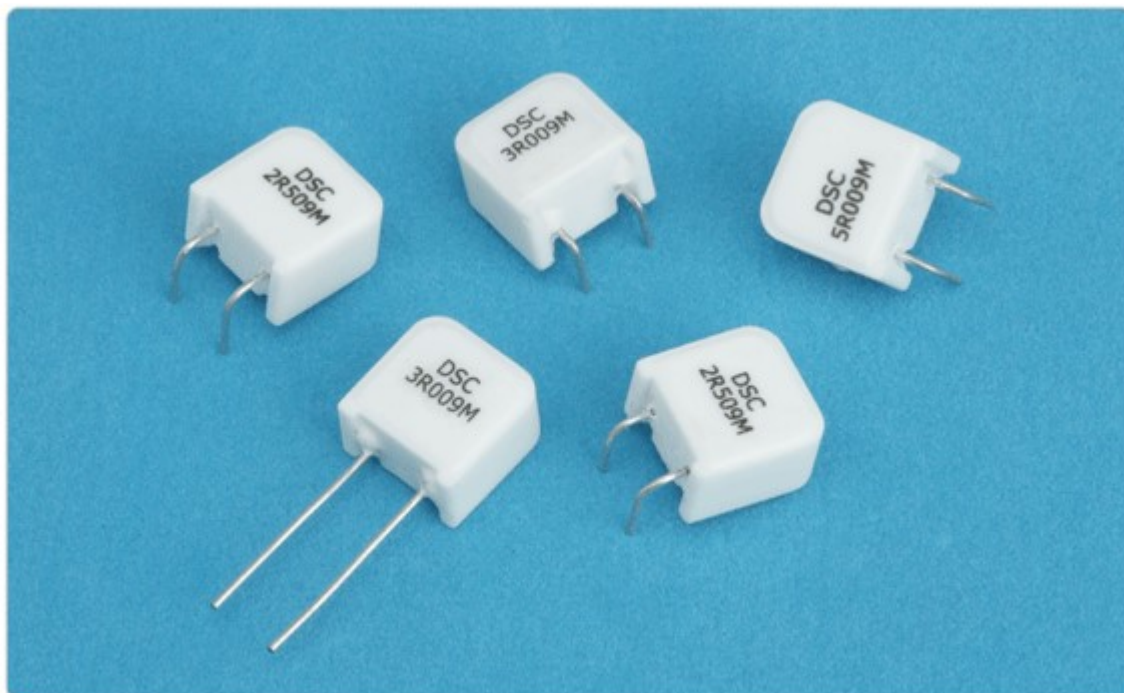

TYPE No. (MODEL)	NORMAL RESISTANCE AT 25°C	MAX. STEADY STATE CURRENT	THERMAL DISSIPATION CONSTANT	THERMAL TIME CONSTANT	NORMAL B CONSTANT	MAX. CAPACITANCE AC240V
ITEM	(Ω) ±20%	(A)	(mW/°C)	(sec)	(25/85°C,K ±10%)	(μF)
DSC-1R309	1.3	4.5			2800	330
DSC-2R509	2.5	4.0			2850	380
DSC-3R009	3.0	3.8			2900	380
DSC-5R009	5.0	3.5			2900	380
DSC-8R009	8.0	3.5			2900	300
DSC-10R009	10.0	3.0	approx. 18	approx. 60	3000	300
DSC-12R009	12.0	3.0			3000	250
DSC-16R009	16.0	2.5			3100	200
DSC-20R009	20.0	2.0			3160	160
DSC-50R009	50.0	1.3			3300	160
DSC-100R009	100.0	0.8			3400	100

TYPE No. (MODEL)	NORMAL RESISTANCE AT 25°C	MAX. STEADY STATE CURRENT	THERMAL DISSIPATION CONSTANT	THERMAL TIME CONSTANT	NORMAL B CONSTANT	MAX. CAPACITANCE AC240V
ITEM	(Ω) ±20%	(A)	(mW/°C)	(sec)	(25/85°C,K ±10%)	(μF)
DSC-2.5D11A	2.5	5.0			2850	550
DSC-3D11A	3.0	5.0			2900	550
DSC-5D11A	5.0	4.0			2950	550
DSC-8D11A	8.0	2.8			3000	500
DSC-10D11A	10.0	3.0	approx. 20	approx. 70	3000	450
DSC-16D11A	16.0	2.8			3050	350
DSC-20D11A	20.0	2.5			3100	350
DSC-25D11A	25.0	2.5			3100	350

TYPE No. (MODEL)	NORMAL RESISTANCE AT 25°C	MAX. STEADY STATE CURRENT	THERMAL DISSIPATION CONSTANT	THERMAL TIME CONSTANT	NORMAL B CONSTANT	MAX. CAPACITANCE AC240V
---------------------	---------------------------------	------------------------------------	------------------------------------	-----------------------------	----------------------	-------------------------------

ITEM	(Ω) ±20%	(A)	(mW/°C)	(sec)	(25/85°C,K ±10%)	(μF)
DSC-1.3D13A	1.3	6.0			2850	700
DSC-2.5D13A	2.5	5.5			2900	700
DSC-3D13A	3.0	5.0			2900	700
DSC-5D13A	5.0	4.0			2950	700
DSC-6D13A	6.0	4.0			2950	700
DSC-7D13A	7.0	4.0			2950	700
DSC-8D13A	8.0	3.5			3000	600
DSC-10D13A	10.0	3.0	approx. 22	approx. 85	3000	600
DSC-12D13A	12.0	3.0			3000	600
DSC-15D13A	15.0	3.0			3050	550
DSC-16D13A	16.0	3.0			3050	550
DSC-18D13A	18.0	3.0			3100	550
DSC-20D13A	20.0	3.0			3150	550
DSC-25D13A	25.0	2.5			3200	550
DSC-50D13A	20.0	2.0			3300	500

TYPE No. (MODEL)	NORMAL RESISTANCE AT 25°C	MAX. STEADY STATE CURRENT	THERMAL DISSIPATION CONSTANT	THERMAL TIME CONSTANT	NORMAL B CONSTANT	MAX. CAPACITANCE AC240V
ITEM	(Ω) ±20%	(A)	(mW/°C)	(sec)	(25/85°C,K ±10%)	(μF)
DSC-1.3D15A	1.3	7.0			2800	560
DSC-1.5D15A	1.5	7.0			2850	560
DSC-2.5D15A	2.5	7.0			2900	950
DSC-3D15A	3.0	6.0			2950	900
DSC-5D15A	5.0	5.0			3000	850
DSC-6D15A	6.0	5.0			3000	680
DSC-7D15A	7.0	4.5			3000	800
DSC-8D15A	8.0	4.5			3050	750
DSC-10D15A	10.0	4.0			3100	750
DSC-12D15A	12.0	4.0			3100	610
DSC-15D15A	15.0	3.5	approx. 25	approx. 100	3150	700
DSC-16D15A	16.0	3.5			3200	680
DSC-18D15A	18.0	3.5			3200	680
DSC-20D15A	20.0	3.0			3200	680
DSC-25D15A	25.0	3.0			3200	680
DSC-30D15A	30.0	2.5			3300	560
DSC-40D15A	40.0	2.0			3350	560
DSC-47D15A	47.0	1.5			3350	470
DSC-80D15A	80.0	1.5			3400	470
DSC-120D15A	120.0	1.5			3500	470
DSC-220D15A	220.0	1.0			3600	450

TYPE No. (MODEL)	NORMAL RESISTANCE AT 25°C	MAX. STEADY STATE CURRENT	THERMAL DISSIPATION CONSTANT	THERMAL TIME CONSTANT	NORMAL B CONSTANT	MAX. CAPACITANCE AC240V
ITEM	(Ω) ±20%	(A)	(mW/°C)	(sec)	(25/85°C,K ±10%)	(μF)
DSC-1.3D20A	1.3	10.0			2900	2000
DSC-2.5D20A	2.5	8.0			2950	2000
DSC-3D20A	3.0	7.5			2950	2000
DSC-5D20A	5.0	7.0			3000	2000
DSC-6D20A	6.0	7.0	approx. 30	approx. 120	3000	2000
DSC-8D20A	8.0	6.0			3050	2000
DSC-10D20A	10.0	6.0			3100	2000
DSC-20D20A	20.0	4.0			3200	1000

