


LOW DROP FIXED AND ADJUSTABLE  
POSITIVE VOLTAGE REGULATOR

The KIA1117PI × × is a Low Drop Voltage Regulator able to provide up to 0.8A of output current, available even in adjustable version (Vref=1.25V)

## FEATURES

- Low Dropout Voltage : 1.1V/Typ. (Iout=0.8A)
- Very Low Quiescent Current : 4.2mA/Typ.
- Output Current up to 0.8A
- Fixed Output Voltage of 1.5V, 1.8V, 2.5V, 2.85V, 3.3V, 5.0V
- Adjustable Version Availability : Vref=1.25V
- Internal Current and Thermal Limit
- Only 10µF for stability
- Available in ±2%(at 25 °C) and 4% in full Temperature range
- High Ripple Rejection : 80dB/Typ.
- Temperature Range : 0 °C ~ 125 °C

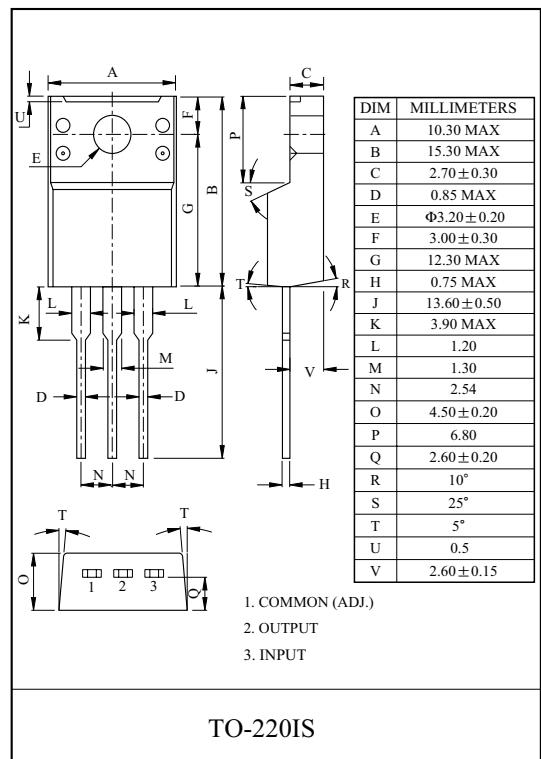

## LINE UP

ITEM	OUTPUT VOLTAGE (V)	PACKAGE
KIA1117PI00	Adjustable (1.25~10V)	TO-220IS
KIA1117PI15	1.5	
KIA1117PI18	1.8	
KIA1117PI25	2.5	
KIA1117PI28	2.85	
KIA1117PI33	3.3	
KIA1117PI50	5.0	

## MAXIMUM RATINGS (Ta=25 °C)

CHARACTERISTIC	SYMBOL	RATING	UNIT
Input Voltage	V <sub>IN</sub>	10	V
Output Current	I <sub>OUT</sub>	0.8	A
Power Dissipation 1 (No heatsink)	P <sub>D1</sub>	2.0	W
Power Dissipation 2 (Without heatsink)	P <sub>D2</sub>	20.8	W
Operating Temperature	T <sub>opr</sub>	0 ~ 125	°C
Storage Temperature	T <sub>stg</sub>	-55 ~ 150	°C

# KIA1117PI00~KIA1117PI50

Fig.1 Application Circuit-1 (Fixed-Type)


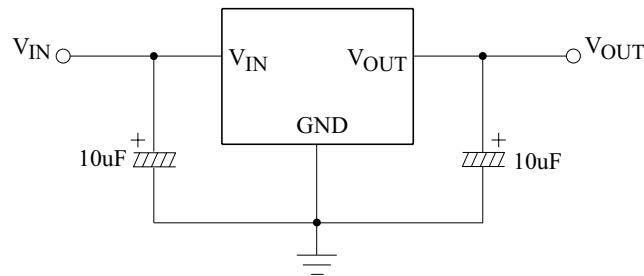


Fig.2 Application Circuit-2 (Adjustable-Type)

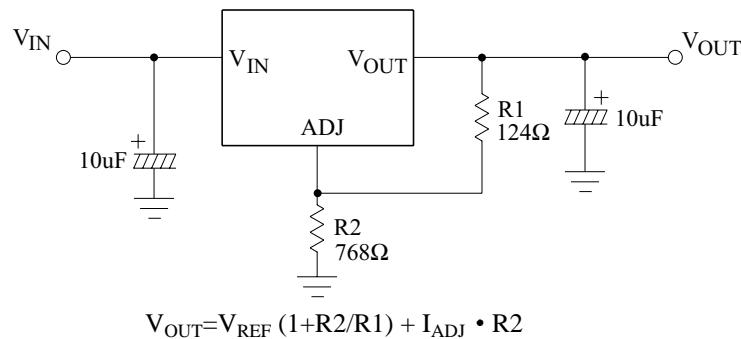

$$V_{OUT} = V_{REF} \left( 1 + R_2/R_1 \right) + I_{ADJ} \cdot R_2$$

## ELECTRICAL CHARACTERISTICS

KIA1117PI00 (Unless otherwise specified, T<sub>j</sub>=0~125 °C)

CHARACTERISTIC	SYMBOL	TEST CONDITIONS	MIN.	TYP.	MAX.	UNIT
Output Voltage	V <sub>OUT1</sub>	V <sub>IN</sub> =V <sub>OUT</sub> +1.5V, I <sub>OUT</sub> =10mA, T <sub>j</sub> =25 °C	1.225	1.25	1.275	V
	V <sub>OUT2</sub>	10mA ≤ I <sub>OUT</sub> ≤ 0.8A, V <sub>OUT</sub> +1.5V ≤ V <sub>IN</sub> ≤ 10V	1.20	1.25	1.30	
Line Regulation	Reg Line	V <sub>OUT</sub> +1.5V ≤ V <sub>IN</sub> ≤ 10V, I <sub>OUT</sub> =10mA	-	1	10	mV
Load Regulation	Reg Load	10mA ≤ I <sub>OUT</sub> ≤ 0.8A, V <sub>IN</sub> =V <sub>OUT</sub> +2.0V	-	15	30	mV
Quiescent Current	I <sub>B1</sub>	V <sub>IN</sub> =V <sub>OUT</sub> +1.25V, I <sub>OUT</sub> =0A	-	4.2	10	mA
	I <sub>B2</sub>	V <sub>IN</sub> =10V, I <sub>OUT</sub> =0A	-	4.2	10	
Adjustable Pin Current	I <sub>ADJ</sub>	V <sub>IN</sub> =V <sub>OUT</sub> +1.5V	-	35	-	μA
Minimum Load Current	I <sub>MIN</sub>	V <sub>IN</sub> =V <sub>OUT</sub> +1.5V	10	-	-	mA
Output Noise Voltage	V <sub>NO</sub>	V <sub>IN</sub> =V <sub>OUT</sub> +1.25V, I <sub>OUT</sub> =40mA, 10Hz ≤ f ≤ 10kHz	-	100	-	μVrms
Short Circuit Current Limit	I <sub>SC</sub>	V <sub>IN</sub> =V <sub>OUT</sub> +2.0V	1.1	-	-	A
Ripple Rejection	R · R	I <sub>OUT</sub> =40mA, f=120Hz, V <sub>ripple</sub> =1Vp-p V <sub>IN</sub> =V <sub>OUT</sub> +3V	60	80	-	dB
Dropout Voltage	V <sub>D</sub>	I <sub>OUT</sub> =0.8A, V <sub>IN</sub> =0.95V <sub>OUT</sub>	-	1.1	1.2	V
Temperature Stability	TCV <sub>O</sub>	V <sub>IN</sub> =V <sub>OUT</sub> +1.5V, I <sub>OUT</sub> =10mA	-	0.5	-	%

# KIA1117PI00~KIA1117PI50

## ELECTRICAL CHARACTERISTICS

KIA1117PI15 (Unless otherwise specified,  $T_j=0\sim125^\circ C$ )

CHARACTERISTIC	SYMBOL	TEST CONDITIONS	MIN.	TYP.	MAX.	UNIT
Output Voltage	$V_{OUT1}$	$V_{IN}=V_{OUT}+1.5V$ , $I_{OUT}=10mA$ , $T_j=25^\circ C$	1.47	1.5	1.53	V
	$V_{OUT2}$	$10mA \leq I_{OUT} \leq 0.8A$ , $V_{OUT}+1.5V \leq V_{IN} \leq 10V$	1.44	1.5	1.56	
Line Regulation	Reg Line	$V_{OUT}+1.5V \leq V_{IN} \leq 10V$ , $I_{OUT}=10mA$	-	1	10	mV
Load Regulation	Reg Load	$10mA \leq I_{OUT} \leq 0.8A$ , $V_{IN}=V_{OUT}+2.0V$	-	15	30	mV
Quiescent Current	$I_{B1}$	$V_{IN}=V_{OUT}+1.25V$ , $I_{OUT}=0A$	-	4.2	10	mA
	$I_{B2}$	$V_{IN}=10V$ , $I_{OUT}=0A$	-	4.2	10	
Output Noise Voltage	$V_{NO}$	$V_{IN}=V_{OUT}+1.25V$ , $I_{OUT}=40mA$ , $10Hz \leq f \leq 10kHz$	-	100	-	$\mu V_{rms}$
Sort Circuit Current Limit	$I_{SC}$	$V_{IN}=V_{OUT}+2.0V$	1.1	-	-	A
Ripple Rejection	$R \cdot R$	$I_{OUT}=40mA$ , $f=120Hz$ , $V_{ripple}=1V_{p-p}$ $V_{IN}=V_{OUT}+3V$	60	80	-	dB
Dropout Voltage	$V_D$	$I_{OUT}=0.8A$ , $V_{IN}=0.95V_{OUT}$	-	1.1	1.2	V
Temperature Stability	$TCV_O$	$V_{IN}=V_{OUT}+1.5V$ , $I_{OUT}=10mA$	-	0.5	-	%

## ELECTRICAL CHARACTERISTICS

KIA1117PI18 (Unless otherwise specified,  $T_j=0\sim125^\circ C$ )

CHARACTERISTIC	SYMBOL	TEST CONDITIONS	MIN.	TYP.	MAX.	UNIT
Output Voltage	$V_{OUT1}$	$V_{IN}=V_{OUT}+1.5V$ , $I_{OUT}=10mA$ , $T_j=25^\circ C$	1.764	1.8	1.836	V
	$V_{OUT2}$	$10mA \leq I_{OUT} \leq 0.8A$ , $V_{OUT}+1.5V \leq V_{IN} \leq 10V$	1.728	1.8	1.872	
Line Regulation	Reg Line	$V_{OUT}+1.5V \leq V_{IN} \leq 10V$ , $I_{OUT}=10mA$	-	1	10	mV
Load Regulation	Reg Load	$10mA \leq I_{OUT} \leq 0.8A$ , $V_{IN}=V_{OUT}+2.0V$	-	15	30	mV
Quiescent Current	$I_{B1}$	$V_{IN}=V_{OUT}+1.25V$ , $I_{OUT}=0A$	-	4.2	10	mA
	$I_{B2}$	$V_{IN}=10V$ , $I_{OUT}=0A$	-	4.2	10	
Output Noise Voltage	$V_{NO}$	$V_{IN}=V_{OUT}+1.25V$ , $I_{OUT}=40mA$ , $10Hz \leq f \leq 10kHz$	-	100	-	$\mu V_{rms}$
Sort Circuit Current Limit	$I_{SC}$	$V_{IN}=V_{OUT}+2.0V$	1.1	-	-	A
Ripple Rejection	$R \cdot R$	$I_{OUT}=40mA$ , $f=120Hz$ , $V_{ripple}=1V_{p-p}$ $V_{IN}=V_{OUT}+3V$	60	80	-	dB
Dropout Voltage	$V_D$	$I_{OUT}=0.8A$ , $V_{IN}=0.95V_{OUT}$	-	1.1	1.2	V
Temperature Stability	$TCV_O$	$V_{IN}=V_{OUT}+1.5V$ , $I_{OUT}=10mA$	-	0.5	-	%

# KIA1117PI00~KIA1117PI50

## ELECTRICAL CHARACTERISTICS

KIA1117PI25 (Unless otherwise specified,  $T_j=0\sim125^\circ C$ )

CHARACTERISTIC	SYMBOL	TEST CONDITIONS	MIN.	TYP.	MAX.	UNIT
Output Voltage	$V_{OUT1}$	$V_{IN}=V_{OUT}+1.5V$ , $I_{OUT}=10mA$ , $T_j=25^\circ C$	2.45	2.5	2.55	V
	$V_{OUT2}$	$10mA \leq I_{OUT} \leq 0.8A$ , $V_{OUT}+1.5V \leq V_{IN} \leq 10V$	2.4	2.5	2.6	
Line Regulation	Reg Line	$V_{OUT}+1.5V \leq V_{IN} \leq 10V$ , $I_{OUT}=10mA$	-	1	10	mV
Load Regulation	Reg Load	$10mA \leq I_{OUT} \leq 0.8A$ , $V_{IN}=V_{OUT}+2.0V$	-	15	30	mV
Quiescent Current	$I_{B1}$	$V_{IN}=V_{OUT}+1.25V$ , $I_{OUT}=0A$	-	4.2	10	mA
	$I_{B2}$	$V_{IN}=10V$ , $I_{OUT}=0A$	-	4.2	10	
Output Noise Voltage	$V_{NO}$	$V_{IN}=V_{OUT}+1.25V$ , $I_{OUT}=40mA$ , $10Hz \leq f \leq 10kHz$	-	100	-	$\mu V_{rms}$
Short Circuit Current Limit	$I_{SC}$	$V_{IN}=V_{OUT}+2.0V$	1.1	-	-	A
Ripple Rejection	$R \cdot R$	$I_{OUT}=40mA$ , $f=120Hz$ , $V_{ripple}=1V_{p-p}$ $V_{IN}=V_{OUT}+3V$	60	80	-	dB
Dropout Voltage	$V_D$	$I_{OUT}=0.8A$ , $V_{IN}=0.95V_{OUT}$	-	1.1	1.2	V
Temperature Stability	$TCV_O$	$V_{IN}=V_{OUT}+1.5V$ , $I_{OUT}=10mA$	-	0.5	-	%

## ELECTRICAL CHARACTERISTICS

KIA1117PI28 (Unless otherwise specified,  $T_j=0\sim125^\circ C$ )

CHARACTERISTIC	SYMBOL	TEST CONDITIONS	MIN.	TYP.	MAX.	UNIT
Output Voltage	$V_{OUT1}$	$V_{IN}=V_{OUT}+1.5V$ , $I_{OUT}=10mA$ , $T_j=25^\circ C$	2.793	2.85	2.907	V
	$V_{OUT2}$	$10mA \leq I_{OUT} \leq 0.8A$ , $V_{OUT}+1.5V \leq V_{IN} \leq 10V$	2.736	2.85	2.964	
Line Regulation	Reg Line	$V_{OUT}+1.5V \leq V_{IN} \leq 10V$ , $I_{OUT}=10mA$	-	1	10	mV
Load Regulation	Reg Load	$10mA \leq I_{OUT} \leq 0.8A$ , $V_{IN}=V_{OUT}+2.0V$	-	15	30	mV
Quiescent Current	$I_{B1}$	$V_{IN}=V_{OUT}+1.25V$ , $I_{OUT}=0A$	-	4.2	10	mA
	$I_{B2}$	$V_{IN}=10V$ , $I_{OUT}=0A$	-	4.2	10	
Output Noise Voltage	$V_{NO}$	$V_{IN}=V_{OUT}+1.25V$ , $I_{OUT}=40mA$ , $10Hz \leq f \leq 10kHz$	-	100	-	$\mu V_{rms}$
Short Circuit Current Limit	$I_{SC}$	$V_{IN}=V_{OUT}+2.0V$	1.1	-	-	A
Ripple Rejection	$R \cdot R$	$I_{OUT}=40mA$ , $f=120Hz$ , $V_{ripple}=1V_{p-p}$ $V_{IN}=V_{OUT}+3V$	60	80	-	dB
Dropout Voltage	$V_D$	$I_{OUT}=0.8A$ , $V_{IN}=0.95V_{OUT}$	-	1.1	1.2	V
Temperature Stability	$TCV_O$	$V_{IN}=V_{OUT}+1.5V$ , $I_{OUT}=10mA$	-	0.5	-	%

# KIA1117PI00~KIA1117PI50

## ELECTRICAL CHARACTERISTICS

KIA1117PI33 (Unless otherwise specified,  $T_j=0\sim125^\circ C$ )

CHARACTERISTIC	SYMBOL	TEST CONDITIONS	MIN.	TYP.	MAX.	UNIT
Output Voltage	$V_{OUT1}$	$V_{IN}=V_{OUT}+1.5V$ , $I_{OUT}=10mA$ , $T_j=25^\circ C$	3.234	3.3	3.366	V
	$V_{OUT2}$	$10mA \leq I_{OUT} \leq 0.8A$ , $V_{OUT}+1.5V \leq V_{IN} \leq 10V$	3.168	3.3	3.432	
Line Regulation	Reg Line	$V_{OUT}+1.5V \leq V_{IN} \leq 10V$ , $I_{OUT}=10mA$	-	1	10	mV
Load Regulation	Reg Load	$10mA \leq I_{OUT} \leq 0.8A$ , $V_{IN}=V_{OUT}+2.0V$	-	15	30	mV
Quiescent Current	$I_{B1}$	$V_{IN}=V_{OUT}+1.25V$ , $I_{OUT}=0A$	-	4.2	10	mA
	$I_{B2}$	$V_{IN}=10V$ , $I_{OUT}=0A$	-	4.2	10	
Output Noise Voltage	$V_{NO}$	$V_{IN}=V_{OUT}+1.25V$ , $I_{OUT}=40mA$ , $10Hz \leq f \leq 10kHz$	-	100	-	$\mu V_{rms}$
Sort Circuit Current Limit	$I_{SC}$	$V_{IN}=V_{OUT}+2.0V$	1.1	-	-	A
Ripple Rejection	$R \cdot R$	$I_{OUT}=40mA$ , $f=120Hz$ , $V_{ripple}=1V_{p-p}$ $V_{IN}=V_{OUT}+3V$	60	80	-	dB
Dropout Voltage	$V_D$	$I_{OUT}=0.8A$ , $V_{IN}=0.95V_{OUT}$	-	1.1	1.2	V
Temperature Stability	$TCV_O$	$V_{IN}=V_{OUT}+1.5V$ , $I_{OUT}=10mA$	-	0.5	-	%

## ELECTRICAL CHARACTERISTICS

KIA1117PI50 (Unless otherwise specified,  $T_j=0\sim125^\circ C$ )

CHARACTERISTIC	SYMBOL	TEST CONDITIONS	MIN.	TYP.	MAX.	UNIT
Output Voltage	$V_{OUT1}$	$V_{IN}=V_{OUT}+1.5V$ , $I_{OUT}=10mA$ , $T_j=25^\circ C$	4.9	5	5.1	V
	$V_{OUT2}$	$10mA \leq I_{OUT} \leq 0.8A$ , $V_{OUT}+1.5V \leq V_{IN} \leq 10V$	4.8	5	5.2	
Line Regulation	Reg Line	$V_{OUT}+1.5V \leq V_{IN} \leq 10V$ , $I_{OUT}=10mA$	-	1	10	mV
Load Regulation	Reg Load	$10mA \leq I_{OUT} \leq 0.8A$ , $V_{IN}=V_{OUT}+2.0V$	-	15	30	mV
Quiescent Current	$I_{B1}$	$V_{IN}=V_{OUT}+1.25V$ , $I_{OUT}=0A$	-	4.2	10	mA
	$I_{B2}$	$V_{IN}=10V$ , $I_{OUT}=0A$	-	4.2	10	
Output Noise Voltage	$V_{NO}$	$V_{IN}=V_{OUT}+1.25V$ , $I_{OUT}=40mA$ , $10Hz \leq f \leq 10kHz$	-	100	-	$\mu V_{rms}$
Sort Circuit Current Limit	$I_{SC}$	$V_{IN}=V_{OUT}+2.0V$	1.1	-	-	A
Ripple Rejection	$R \cdot R$	$I_{OUT}=40mA$ , $f=120Hz$ , $V_{ripple}=1V_{p-p}$ $V_{IN}=V_{OUT}+3V$	60	80	-	dB
Dropout Voltage	$V_D$	$I_{OUT}=0.8A$ , $V_{IN}=0.95V_{OUT}$	-	1.1	1.2	V
Temperature Stability	$TCV_O$	$V_{IN}=V_{OUT}+1.5V$ , $I_{OUT}=10mA$	-	0.5	-	%

# KIA1117PI00~KIA1117PI50

Fig. 3  $V_D - I_{OUT}$

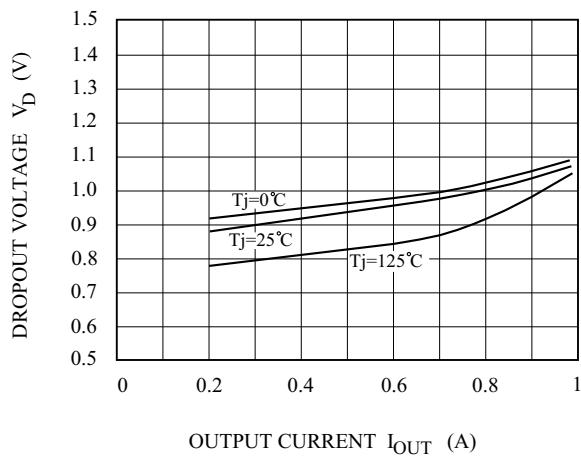


Fig. 4  $V_{REF} - T_j$

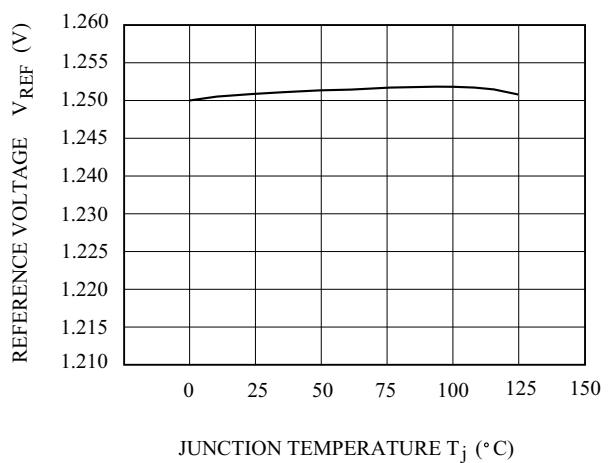


Fig.5  $I_{OUT(MIN)} - T_j$

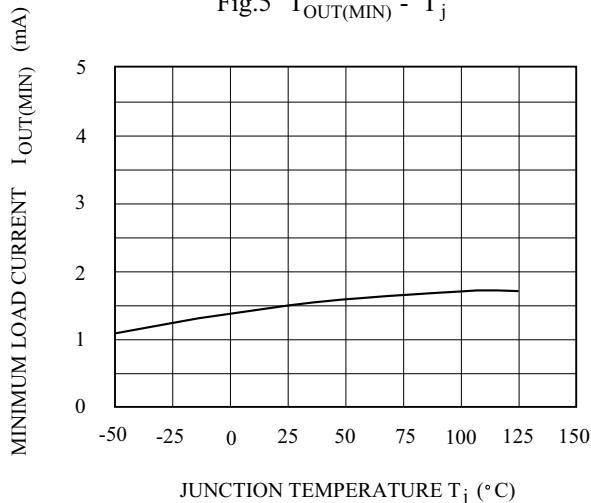


Fig.6  $I_{ADJ} - T_j$

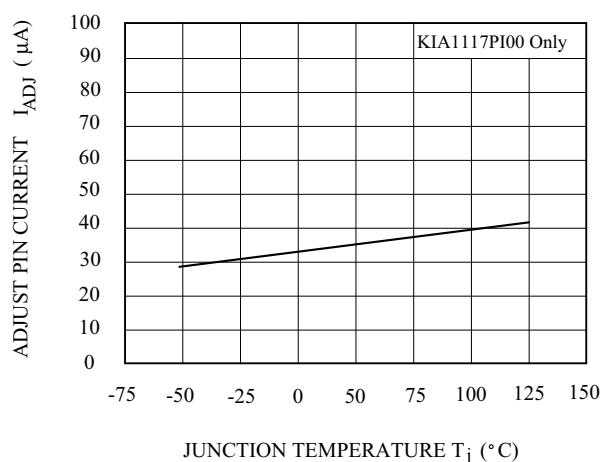


Fig.7  $I_{SC} - T_j$


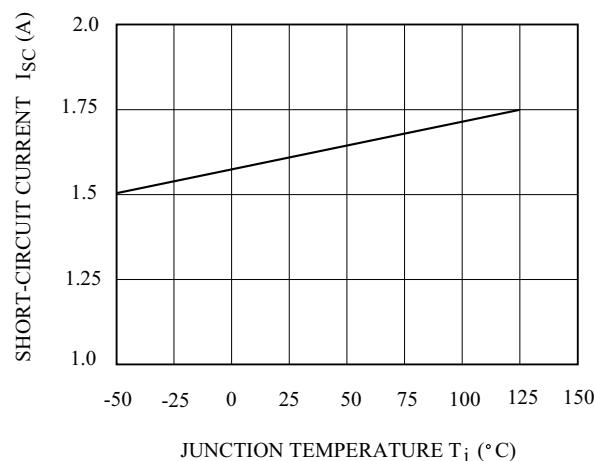


Fig.8 R.R-f

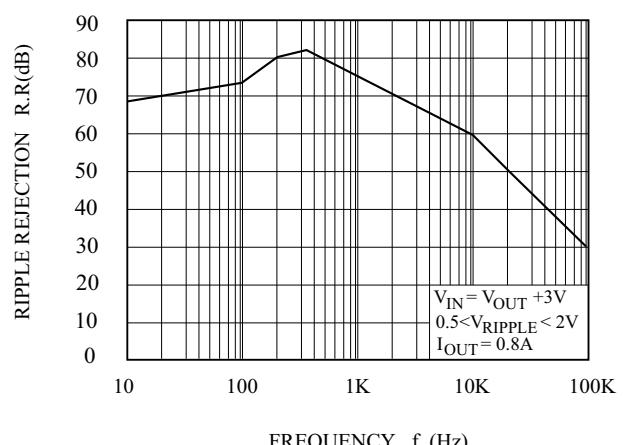

# KIA1117PI00~KIA1117PI50

---

Fig.9 P<sub>D</sub> - T<sub>a</sub>

