




SMART-DAA Transformer

- Approved by Conexant for their SMART-DAA solution
- RoHS Compliant
- Surface Mountable package
- Operating Temperature 0°C~70°C


Electrical Specifications @25°C

OCL:	Pri.:30uH Min. @10KHz/0.01V
Hi-POT :	2000 V
D.C.R:	Pri.: 0.225 ohm Max. Sec.: 0.325 ohm Max.
Turn Ratio:	Pri: Sec=1:1.666±3%

Dimensions (Units: mm)

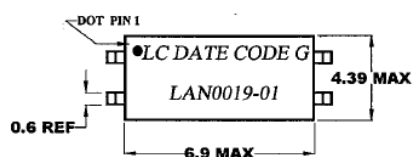

Schematic

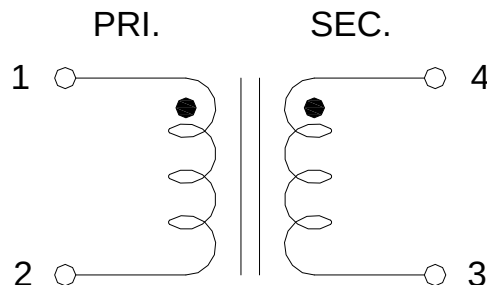

Mark

- 1.LAN****----LAN0019-01
2. X----PRODUCT LINE or BLANK
3. DATE CODE----YYWW
4. G----RoHS

Unless otherwise specified, all tolerances are ± 0.25