


SMART-DAA Transformer


- Approved by Conexant for their SMART-DAA solution
- Surface Mountable package
- Operating Temperature 0°C to 70°C

Electrical Specification @25	
OCL:	Pri:30uH Min. @10KHz/10mVrms
Turn Ratio:	Pri:Sec=1:1.666±1%
Hi-POT :	2000 Vrms
D.C.R:	Pri: 0.225 ohm Max. Sec: 0.325 ohm Max.

Dimensions

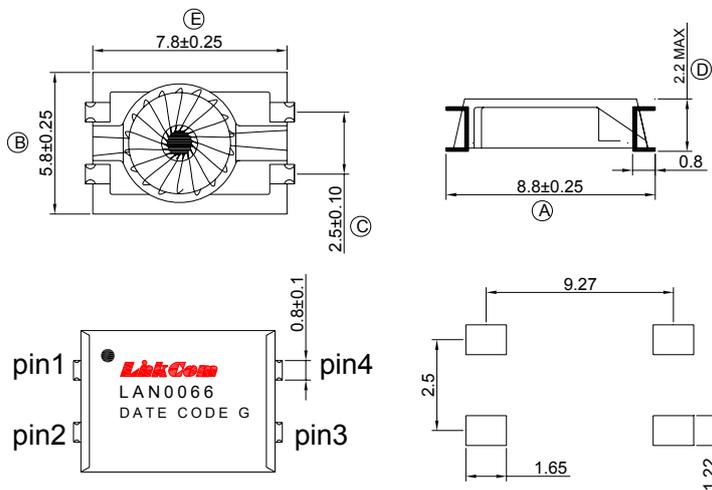

Schematic

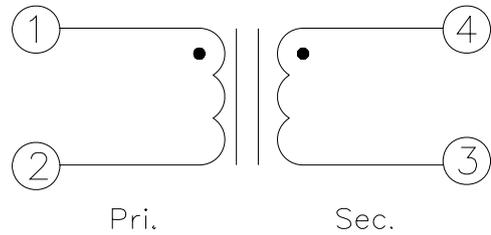

Units: mm

Unless otherwise specified, all tolerances are ± 0.25