


SMBJ



600 W Transient voltage suppressor



Product features

- Low profile SMB package
- Excellent clamping capability
- 600 W peak pulse power capability at 10/1000 μ s waveform
- Typical I_R less than 1 μ A above 10 V
- Fast response time: typically less than 1.0 ps from 0 V to V_{BR} minimum
- High temperature reflow soldering: +260 °C /40 s at terminal
- Plastic package meets UL 94 V-0 flammability rating
- Meets moisture sensitivity level (MSL) level 1
- Terminal: Solder plated leads, solderable per J-STD-002
- For surface mounted applications in order to optimize board space
- UL 497B recognized.
File No. : E198449 Guide QVGQ2

PIN configuration



Applications

- Consumer electronics
- Telecommunications
- Computing and servers
- Appliances
- Industrial automation
- Mobile and wearables

Environmental compliance and general specifications



Ordering part number

SMBJ 5.0 C A

Family name _____

V_R voltage _____

Bi-/Uni-Directional (Blank=Uni, C=Bi) _____

Voltage tolerance _____

Alternate ordering part number

SMBJE 5.0 C A

Family name _____

V_R voltage ("." indicates decimal point) _____

Bi-/Uni-Directional (Blank=Uni, C=Bi) _____

Voltage tolerance _____


Absolute maximum ratings

(+25 °C, RH=45%-75%, unless otherwise noted)

Parameter	Symbol	Value	Unit
Storage operating junction temperature range	T_{STG}/T_J	-55 to +150	°C
Steady state power dissipation at $T_L = +75$ °C	$P_{M(AV)}$	5.0	W
Peak pulse power dissipation on 10/1000 μ s waveform	P_{PP}	600	W
Maximum instantaneous forward voltage at 100 A for unidirectional	V_F	5.0	V
Peak forward surge current, 8.3 ms single half sine wave ¹	I_{FSM}	100	A
Typical thermal resistance junction to lead	$R_{\theta JL}$	20	°C/W
Typical thermal resistance junction to ambient	$R_{\theta JA}$	100	°C/W

1. Measured on 8.3 ms single half sine wave or equivalent square wave for unidirectional device only, duty cycle = 4 per minute maximum

Mechanical parameters, pad layout- mm

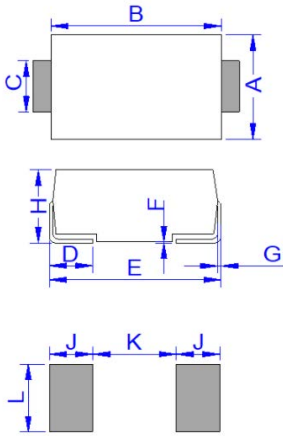

Dimension	Millimeters		Inches	
	Minimum	Maximum	Minimum	Maximum
A	3.30	3.94	0.130	0.155
B	4.30	4.80	0.169	0.189
C	1.90	2.20	0.075	0.087
D	0.95	1.52	0.037	0.060
E	5.20	5.60	0.205	0.220
F	0.051	0.203	0.002	0.008
G	0.15	0.31	0.006	0.012
H	2.10	2.40	0.083	0.094
J	2.20		0.087	
K		2.60		0.102
L	2.30		0.091	

Part marking




Cathode band (uni-polar only)
Part marking: xx = Refer to marking designator listed in Electrical Characteristics table
yyyy- date code

Packaging information (mm)

Drawing not to scale.

Supplied in tape and reel packaging, 3,000 parts per 13" diameter reel (EIA-481 compliant)

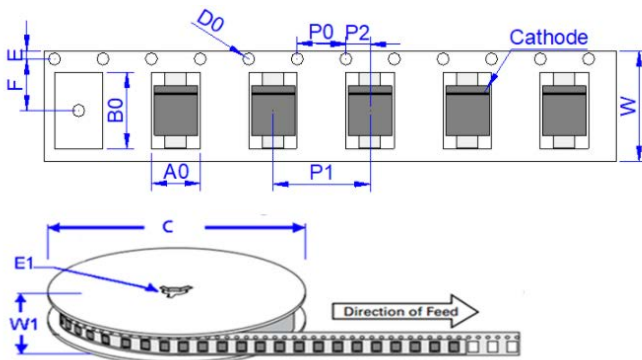

Dimension	Millimeters	Inches
A0	3.76 ± 0.3	0.148 ± 0.012
B0	5.69 ± 0.3	0.224 ± 0.012
C	330.0	13.0
D0	1.55 ± 0.1	0.061 ± 0.004
E	1.75 ± 0.2	0.069 ± 0.008
E1	13.3 ± 0.3	0.524 ± 0.012
F	5.50 ± 0.2	0.217 ± 0.008
P0	4.00 ± 0.2	0.157 ± 0.008
P1	8.00 ± 0.2	0.3145 ± 0.008
P2	2.00 ± 0.2	0.079 ± 0.008
W	12.0 ± 0.2	0.472 ± 0.008
W1	15.7 ± 2.0	0.618 ± 0.079


Electrical characteristics (+25 °C)

Part number	Marking		V_R (V)	$I_R @ V_R$ (μ A)	$V_{BR} @ I_T$		I_T (mA)	$V_C @ I_{PP}$ max (V)	I_{PP} (A)
	Uni-polar	Bi-polar			min (V)	max (V)			
SMBJ5.0A	SMBJ5.0CA	KE AE	5	120	6.4	7	10	9.2	65.2
SMBJ6.0A	SMBJ6.0CA	KG AG	6	120	6.67	7.37	10	10.3	58.3
SMBJ6.5A	SMBJ6.5CA	KK AK	6.5	120	7.22	7.98	10	11.2	53.6
SMBJ7.0A	SMBJ7.0CA	KM AM	7	50	7.78	8.6	10	12	50
SMBJ7.5A	SMBJ7.5CA	KP AP	7.5	50	8.33	9.21	1	12.9	46.5
SMBJ8.0A	SMBJ8.0CA	KR AR	8	20	8.89	9.83	1	13.6	44.1
SMBJ8.5A	SMBJ8.5CA	KT AT	8.5	10	9.44	10.4	1	14.4	41.7
SMBJ9.0A	SMBJ9.0CA	KV AV	9	5	10	11.1	1	15.4	39
SMBJ10A	SMBJ10CA	KX AX	10	2	11.1	12.3	1	17	35.3
SMBJ11A	SMBJ11CA	KZ AZ	11	1	12.2	13.5	1	18.2	33
SMBJ12A	SMBJ12CA	LE BE	12	1	13.3	14.7	1	19.9	30.2
SMBJ13A	SMBJ13CA	LG BG	13	1	14.4	15.9	1	21.5	27.9
SMBJ14A	SMBJ14CA	LK BK	14	1	15.6	17.2	1	23.2	25.9
SMBJ15A	SMBJ15CA	LM BM	15	1	16.7	18.5	1	24.4	24.6
SMBJ16A	SMBJ16CA	LP BP	16	1	17.8	19.7	1	26	23.1
SMBJ17A	SMBJ17CA	LR BR	17	1	18.9	20.9	1	27.6	21.8
SMBJ18A	SMBJ18CA	LT BT	18	1	20	22.1	1	29.2	20.6
SMBJ20A	SMBJ20CA	LV BV	20	1	22.2	24.5	1	32.4	18.6
SMBJ22A	SMBJ22CA	LX BX	22	1	24.4	26.9	1	35.5	16.9
SMBJ24A	SMBJ24CA	LZ BZ	24	1	26.7	29.5	1	38.9	15.4
SMBJ26A	SMBJ26CA	ME CE	26	1	28.9	31.9	1	42.1	14.3
SMBJ28A	SMBJ28CA	MG CG	28	1	31.1	34.4	1	45.4	13.2
SMBJ30A	SMBJ30CA	MK CK	30	1	33.3	36.8	1	48.4	12.4
SMBJ33A	SMBJ33CA	MM CM	33	1	36.7	40.6	1	53.3	11.3
SMBJ36A	SMBJ36CA	MP CP	36	1	40	44.2	1	58.1	10.4
SMBJ40A	SMBJ40CA	MR CR	40	1	44.4	49.1	1	64.5	9.3
SMBJ43A	SMBJ43CA	MT CT	43	1	47.8	52.8	1	69.4	8.7
SMBJ45A	SMBJ45CA	MV CV	45	1	50	55.3	1	72.7	8.3
SMBJ48A	SMBJ48CA	MX CX	48	1	53.3	58.9	1	77.4	7.8
SMBJ51A	SMBJ51CA	MZ CZ	51	1	56.7	62.7	1	82.4	7.3
SMBJ54A	SMBJ54CA	NE DE	54	1	60	66.3	1	87.1	6.9
SMBJ58A	SMBJ58CA	NG DG	58	1	64.4	71.2	1	93.6	6.4
SMBJ60A	SMBJ60CA	NK DK	60	1	66.7	73.7	1	96.8	6.2
SMBJ64A	SMBJ64CA	NM DM	64	1	71.1	78.6	1	103	5.8
SMBJ70A	SMBJ70CA	NP DP	70	1	77.8	86	1	113	5.3
SMBJ75A	SMBJ75CA	NR DR	75	1	83.3	92.1	1	121	5
SMBJ78A	SMBJ78CA	NT DT	78	1	86.7	95.8	1	126	4.8
SMBJ85A	SMBJ85CA	NV DV	85	1	94.4	104	1	137	4.4
SMBJ90A	SMBJ90CA	NX DX	90	1	100	111	1	146	4.1
SMBJ100A	SMBJ100CA	NZ DZ	100	1	111	123	1	162	3.7
SMBJ110A	SMBJ110CA	PE EE	110	1	122	135	1	177	3.4
SMBJ120A	SMBJ120CA	PG EG	120	1	133	147	1	193	3.1
SMBJ130A	SMBJ130CA	PK EK	130	1	144	159	1	209	2.9
SMBJ150A	SMBJ150CA	PM EM	150	1	167	185	1	243	2.5
SMBJ160A	SMBJ160CA	PP EP	160	1	178	197	1	259	2.3
SMBJ170A	SMBJ170CA	PR ER	170	1	189	209	1	275	2.2
SMBJ180A	SMBJ180CA	PT ET	180	1	201	222	1	292	2.1
SMBJ190A	SMBJ190CA	PV EV	190	1	211	234	1	307	2
SMBJ200A	SMBJ200CA	PX EX	200	1	224	247	1	324	1.9
SMBJ210A	SMBJ210CA	PZ EZ	210	1	233	258	1	337	1.8
SMBJ220A	SMBJ220CA	QE FE	220	1	246	272	1	356	1.7
SMBJ250A	SMBJ250CA	QG FG	250	1	279	309	1	405	1.5
SMBJ300A	SMBJ300CA	QK FK	300	1	335	371	1	486	1.3
SMBJ350A	SMBJ350CA	QM FM	350	1	391	432	1	567	1.1
SMBJ400A	SMBJ400CA	QP FP	400	1	447	494	1	648	0.9
SMBJ440A	SMBJ440CA	QR FR	440	1	492	543	1	713	0.8


Note: Standard part numbers listed. Alternate part numbers have the addition of an E and a "-" for the "." where applicable. Example standard part number SMBJ5.0A, Alternate part number SMBJE5-0A

Ratings and V-I characteristic curves (+25 °C unless otherwise noted)

V- I curve characteristics (Uni-directional)

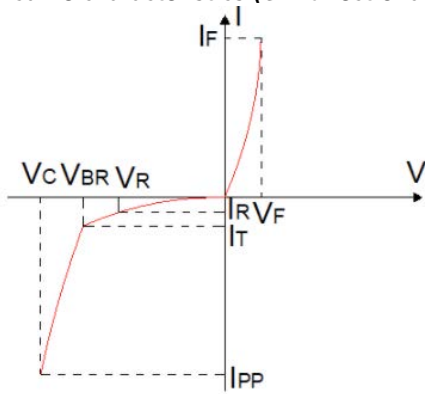

V- I curve characteristics (Bi-directional)

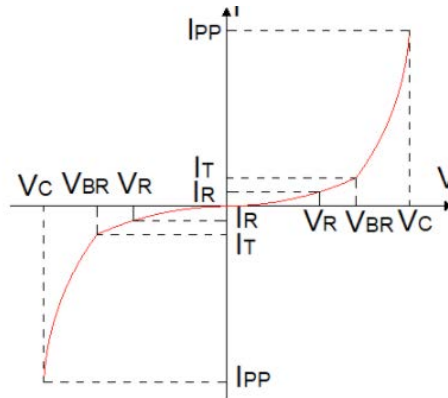

Surge waveform: 10/1000 μ s

V_R : Stand-off voltage – Maximum voltage that can be applied

V_{BR} : Breakdown voltage


V_C : Clamping voltage – Peak voltage measured across the suppressor at a specified I_{PP}

I_R : Reverse leakage current


I_T : Test current

V_F : Forward voltage drop for Uni-directional TVS diode


Pulse waveform

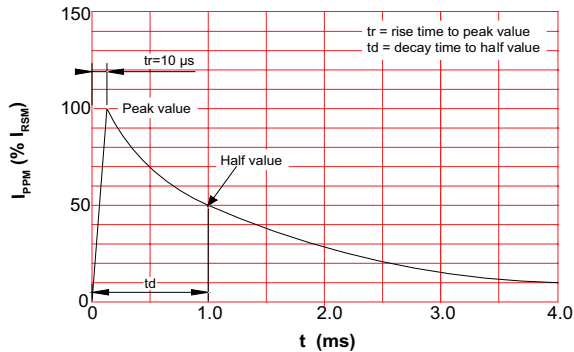

Pulse derating curve

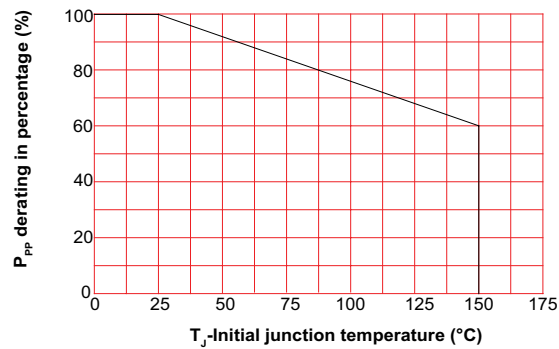

Peak pulse power dissipation vs. pulse width

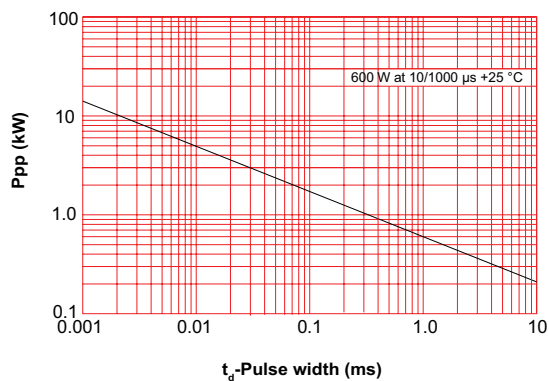

Solder reflow profile

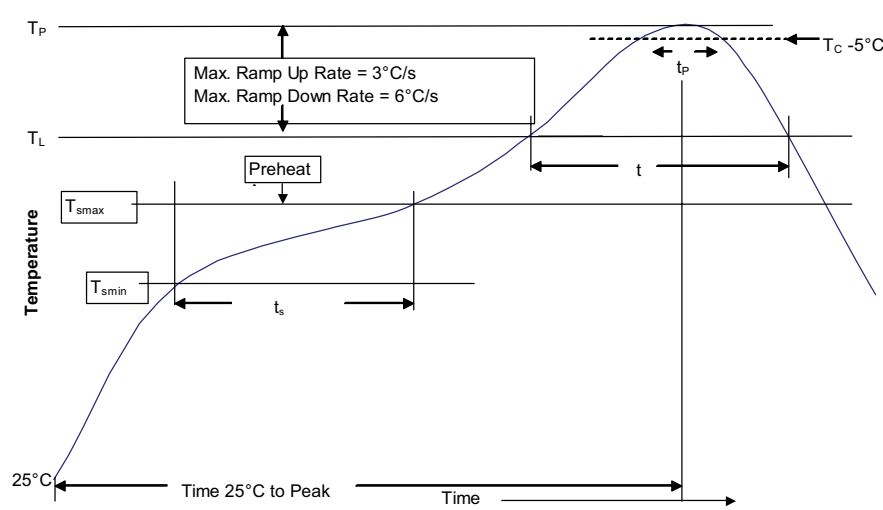


Table 1 - Standard SnPb solder (T_C)

Package thickness	Volume mm ³ <350	Volume mm ³ ≥350
<2.5 mm	235 °C	220 °C
≥2.5 mm	220 °C	220 °C

Table 2 - Lead (Pb) free solder (T_C)

Package thickness	Volume mm ³ <350	Volume mm ³ 350 - 2000	Volume mm ³ >2000
<1.6 mm	260 °C	260 °C	260 °C
1.6 – 2.5 mm	260 °C	250 °C	245 °C
>2.5 mm	250 °C	245 °C	245 °C

Reference J-STD-020

Profile feature	Standard SnPb solder	Lead (Pb) free solder
Preheat and soak		
• Temperature min. (T_{smin})	100 °C	150 °C
• Temperature max. (T_{smax})	150 °C	200 °C
• Time (T_{smin} to T_{smax}) (t_s)	60-120 seconds	60-180 seconds
Ramp up rate T_L to T_p	3 °C/ second max.	3 °C/ second max.
Liquidous temperature (T_L)	183 °C	217 °C
Time (t_L) maintained above T_L	60-150 seconds	60-150 seconds
Peak package body temperature (T_p)*	Table 1	Table 2
Time (t_p)* within 5 °C of the specified classification temperature (T_C)	20 seconds*	40 seconds*
Ramp-down rate (T_p to T_L)	6 °C/ second max.	6 °C/ second max.
Time 25 °C to peak temperature	6 minutes max.	8 minutes max.

* Tolerance for peak profile temperature (T_p) is defined as a supplier minimum and a user maximum.

Life Support Policy: Eaton does not authorize the use of any of its products for use in life support devices or systems without the express written approval of an officer of the Company. Life support systems are devices which support or sustain life, and whose failure to perform, when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in significant injury to the user.

Eaton reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Eaton also reserves the right to change or update, without notice, any technical information contained in this bulletin.

Eaton
Electronics Division
1000 Eaton Boulevard
Cleveland, OH 44122
United States
Eaton.com/electronics

© 2024 Eaton
All Rights Reserved
Printed in USA
Publication No. 11214
September 2024

Eaton is a registered trademark.

All other trademarks are property
of their respective owners.

Follow us on social media to get the
latest product and support information.

