


VERTICAL DEFLECTION BOOSTER

- POWER AMPLIFIER
- FLYBACK GENERATOR
- THERMAL PROTECTION
- OUTPUT CURRENT UP TO $2.0A_{PP}$
- FLYBACK VOLTAGE UP TO 90V (on Pin 5)
- SUITABLE FOR DC COUPLING APPLICATION



HEPTAWATT
(Plastic Package)

ORDER CODE : STV9379


DESCRIPTION

Designed for monitors and high performance TVs, the STV9379 vertical deflection booster delivers flyback voltages close to 90V.

The STV9379 operates with supplies up to 42V and provides up to $2A_{PP}$ output current to drive the yoke.


The STV9379 is offered in HEPTAWATT package.

PIN CONNECTIONS

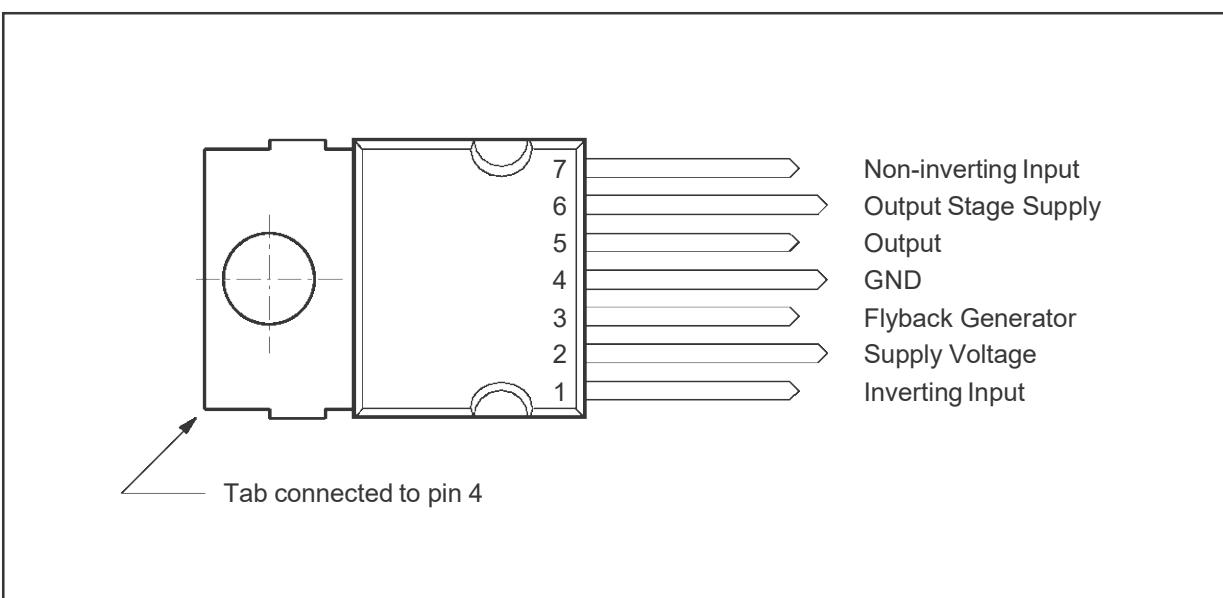

STV9379

BLOCK DIAGRAM

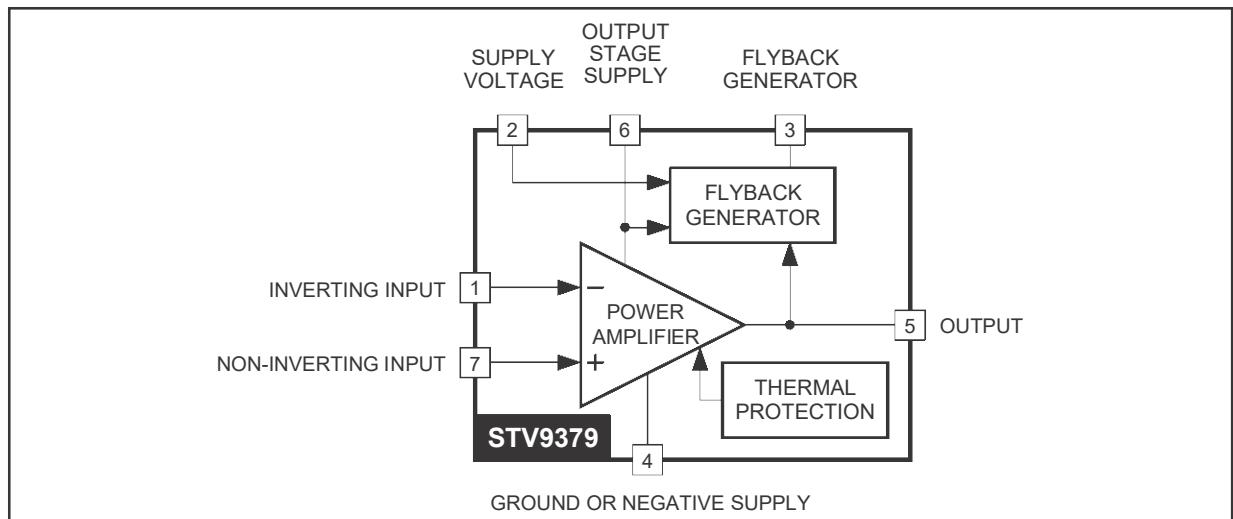

ABSOLUTE MAXIMUM RATINGS

Symbol	Parameter	Value	Unit
V_S	Supply Voltage (Pin 2) (see note 1)	50	V
V_6	Flyback Peak Voltage (Pin 6) (see note 1)	100	V
V_1, V_7	Amplifier Input Voltage (Pins 1-7) (see note 1)	- 0.3, + V_S	V
I_O	Maximum Output Peak Current (see notes 2 and 3)	1.5	A
I_3	Maximum Sink Current (first part of flyback) ($t < 1\text{ms}$)	1.5	A
I_3	Maximum Source Current ($t < 1\text{ms}$)	1.5	A
V_{ESD}	ESD susceptibility : EIAJ Norm (200pF discharged through 0Ω)	300	V
T_{oper}	Operating Ambient Temperature	- 20, + 75	$^{\circ}\text{C}$
T_{stg}	Storage Temperature	- 40, + 150	$^{\circ}\text{C}$
T_j	Junction Temperature	+150	$^{\circ}\text{C}$

Notes :

- 1. Versus Pin 4.
- 2. The output current can reach 4A peak for $t \leq 10\mu\text{s}$ (up to 120Hz).
- 3. Provided SOAR is respected (see Figures 1 and 2).

THERMAL DATA

Symbol	Parameter	Value	Unit
$R_{th(j-c)}$	Junction-case Thermal Resistance Max.	3	$^{\circ}\text{C/W}$
T_t	Temperature for Thermal Shutdown	150	$^{\circ}\text{C}$
ΔT_t	Hysteresis on T_t	10	$^{\circ}\text{C}$
T_{jr}	Recommended Max. Junction Temperature	120	$^{\circ}\text{C}$

ELECTRICAL CHARACTERISTICS


(Vs = 42V, TA = 25°C, unless otherwise specified)

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
Vs	Operating Supply Voltage Range	Versus Pin 4	10		42	V
I2	Pin 2 Quiescent Current	I3 = 0, I5 = 0		10	20	mA
I6	Pin 6 Quiescent Current	I3 = 0, I5 = 0	5	10	30	mA
Io	Max. Peak Output Current				1	A
I1	Amplifier Bias Current	V1 = 25V, V7 = 26V		- 0.15	- 1	µA
I7	Amplifier Bias Current	V1 = 26V, V7 = 25V		- 0.15	- 1	µA
VIO	Offset Voltage				7	mV
ΔVIO/dt	Offset Drift versus Temperature			- 10		µV/°C
GV	Voltage Gain		80			dB
V5L	Output Saturation Voltage to GND (Pin 4)	I5 = 1A		1	1.5	V
V5H	Output Saturation Voltage to Supply (Pin 6)	I5 = - 1A		1.6	2.1	V
VD5-6	Diode Forward Voltage between Pins 5-6	I5 = 1A		1.5	2	V
VD3-2	Diode Forward Voltage between Pins 3-2	I3 = 1A		1.5	2	V
V3L	Saturation Voltage on Pin 3	I3 = 20mA		0.8	1.2	V
V3SH	Saturation Voltage to Pin 2 (2nd part of flyback)	I3 = - 1A		2.1	2.9	V

9379-03.TBL

APPLICATION CIRCUITS

AC COUPLING

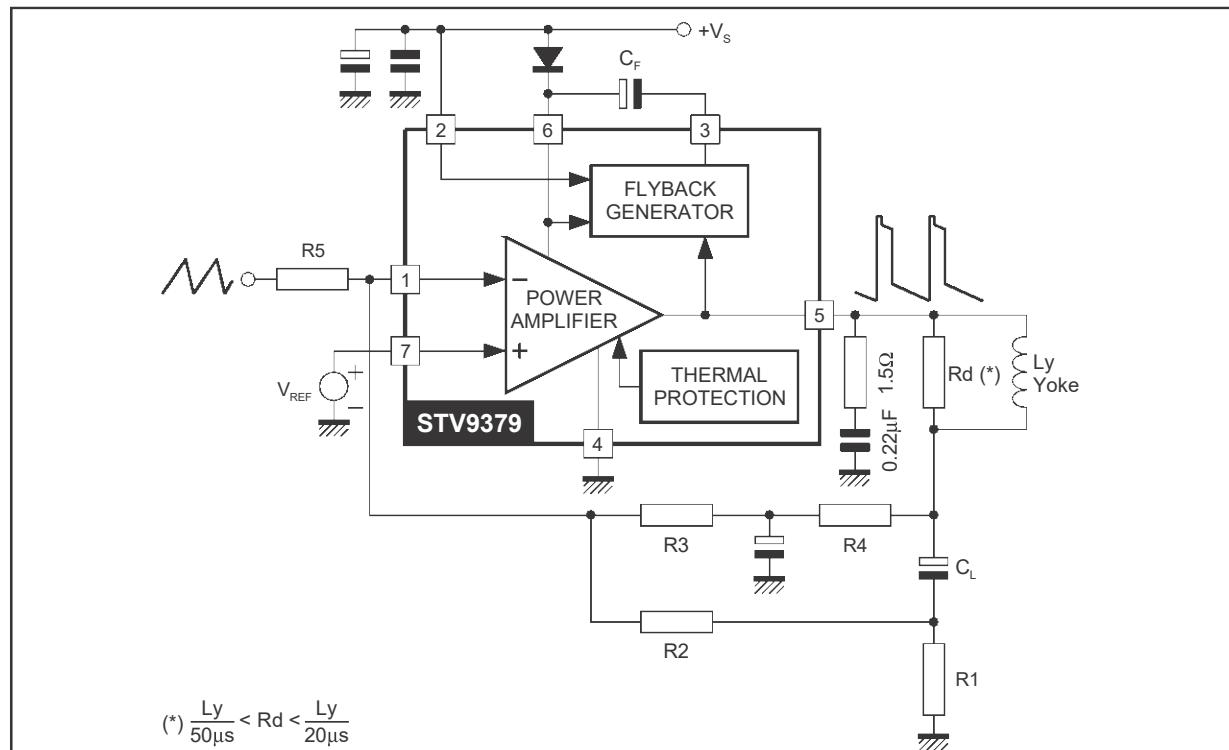


9379-03.EPS

STV9379

APPLICATION CIRCUITS (continued)

DC COUPLING

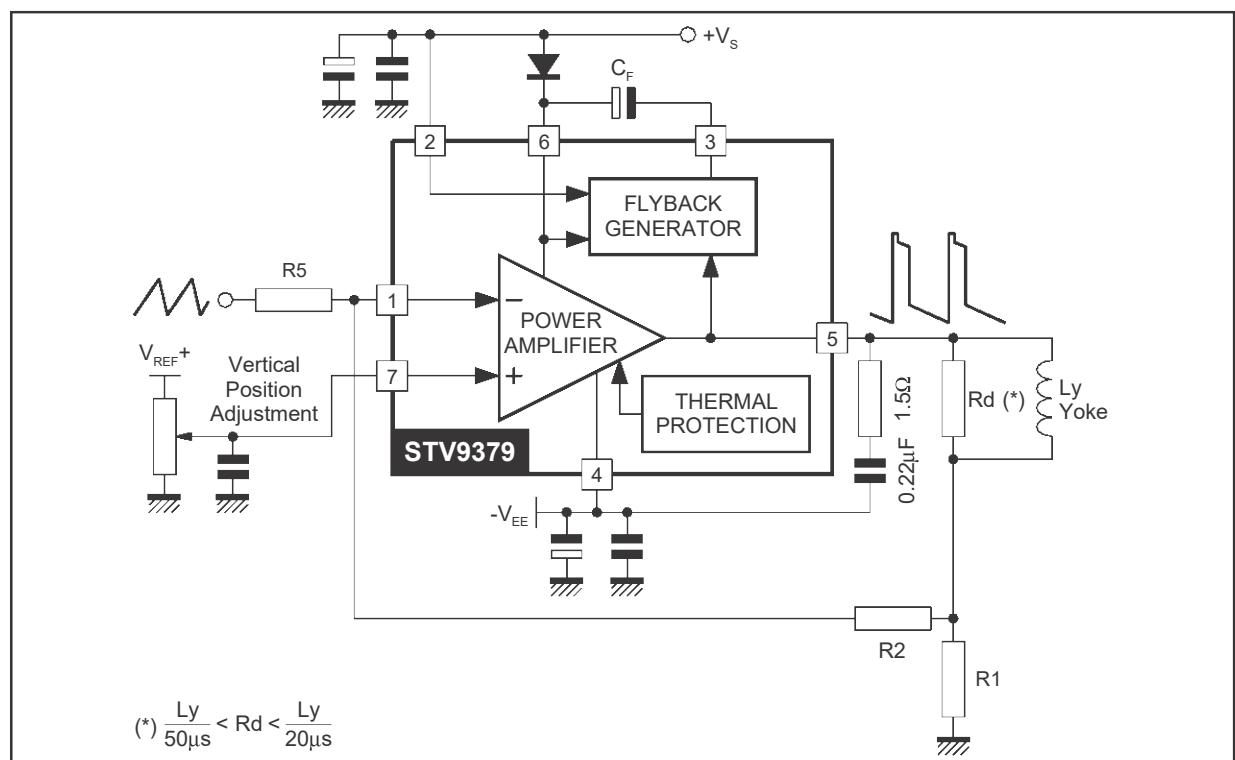

9379-04.EPS

Figure 1 : Output Transistors SOA
(for secondary breakdown)



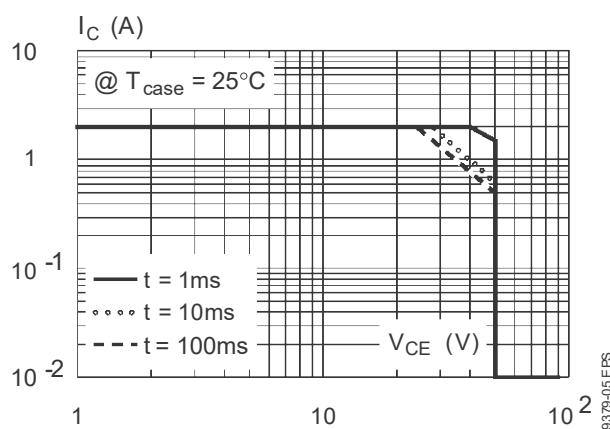


Figure 2 : Secondary Breakdown Temperature Derating Curve
(ISB = secondary breakdown current)

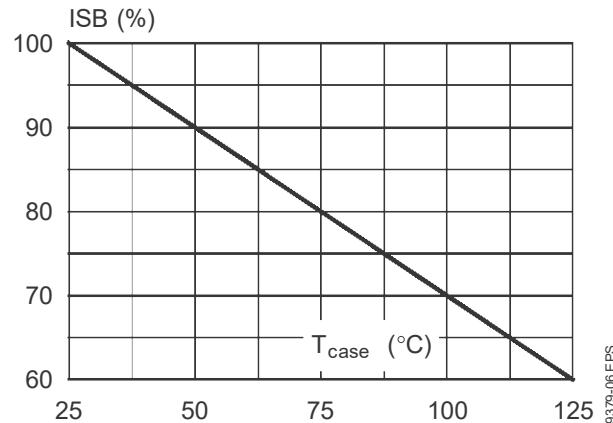

9379-05.EPS

PACKAGE MECHANICAL DATA : 7 PINS - PLASTIC HEPTAWATT

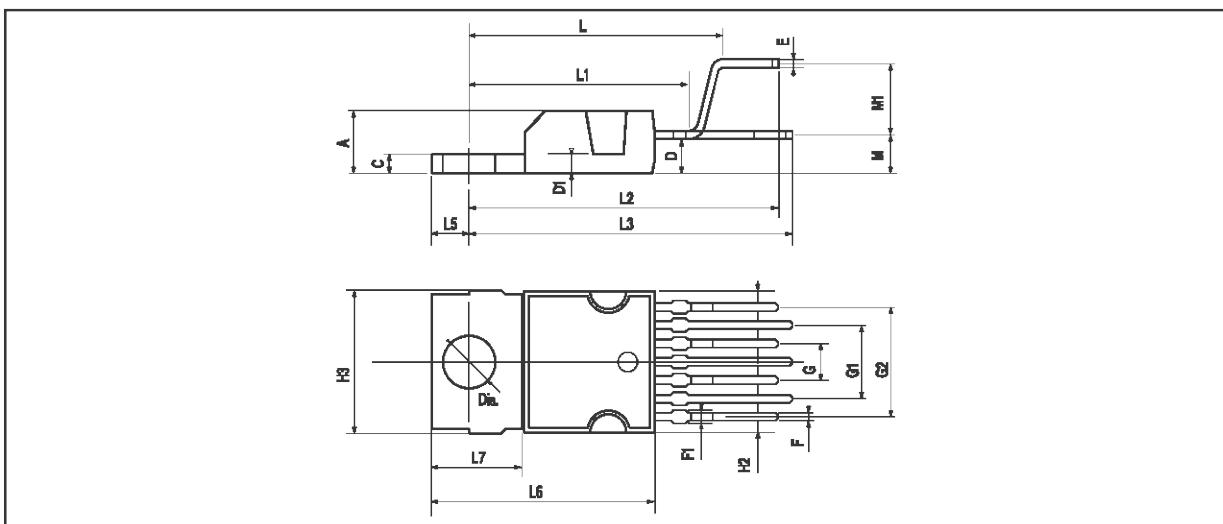

Dimensions	Millimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A			4.8			0.189
C			1.37			0.054
D	2.4		2.8	0.094		0.110
D1	1.2		1.35	0.047		0.053
E	0.35		0.55	0.014		0.022
F	0.6		0.8	0.024		0.031
F1			0.9			0.035
G	2.41	2.54	2.67	0.095	0.100	0.105
G1	4.91	5.08	5.21	0.193	0.200	0.205
G2	7.49	7.62	7.8	0.295	0.300	0.307
H2			10.4			0.409
H3	10.05		10.4	0.396		0.409
L		16.97			0.668	
L1		14.92			0.587	
L2		21.54			0.848	
L3		22.62			0.891	
L5	2.6		3	0.102		0.118
L6	15.1		15.8	0.594		0.622
L7	6		6.6	0.236		0.260
M		2.8			0.110	
M1		5.08			0.200	
Dia.	3.65		3.85	0.144		0.152

Information furnished is believed to be accurate and reliable. However, STMicroelectronics assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No licence is granted by implication or otherwise under any patent or patent rights of STMicroelectronics. Specifications mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. STMicroelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of STMicroelectronics.

The ST logo is a registered trademark of STMicroelectronics

© 1998 STMicroelectronics - All Rights Reserved

Purchase of I²C Components of STMicroelectronics, conveys a license under the Philips I²C Patent.
Rights to use these components in a I²C system, is granted provided that the system conforms to
the I²C Standard Specifications as defined by Philips.

STMicroelectronics GROUP OF COMPANIES

Australia - Brazil - Canada - China - France - Germany - Italy - Japan - Korea - Malaysia - Malta - Mexico - Morocco - The Netherlands
Singapore - Spain - Sweden - Switzerland - Taiwan - Thailand - United Kingdom - U.S.A.